


[Sign in](#)

**Web** Results 1 - 93 of about 254 for insert retriev object node logical zone peer "distributed hash table". ((

Did you mean: insert **retrieve** object node **logic** zone peer "distributed hash table"

### di: JXTA Distributed Indexing

Each **peer** in the **distributed hash-table** is assigned a responsibility for indexing a range (**zone**) of numbers. In addition, there is a connection topology and ...

di.jxta.org/ - 17k - [Cached](#) - [Similar pages](#)

### [PDF] CS603: Distributed Systems

File Format: PDF/Adobe Acrobat - [View as HTML](#)

the **node** S responsible for k. I. **Retrieve object** from **node** S ... Voluntarily leave: **node** transfers its **zone** and the pairs. of keys and data to a neighbor ...

homes.cerias.purdue.edu/~crisn/courses/cs603\_Spring\_2006/cs603\_lect17and18.pdf - [Similar pages](#)

### [doc] 1

File Format: Microsoft Word - [View as HTML](#)

The (K, V) pair is then stored at the **node** that owns the **zone** within which point P lies. To **retrieve** the entry corresponding to K, any **node** can apply the ...

www.srdc.metu.edu.tr/webpage/projects/artemis/documents/D3.1.1.3-SOAv1.1\_P2P-2.doc - [Similar pages](#)

### [PDF] A Scalable Semantic Indexing Framework for Peer-to-Peer ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**distributed hash table** (DHT) based network, in a way that seman- ... **node** whose **zone** contains the point. Locating an **object** is reduced ...

hdir2005.isti.cnr.it/camera-ready/7.Chen.pdf - [Similar pages](#)

### [PDF] LNCS 2920 - Design of a Secure Distributed Service Directory for ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

stored on the **node** which owns the **zone** within which P lies. To **retrieve** an entry. corresponding to a key K, any **node** can apply the same deterministic hash ...

i30www.ira.uka.de/research/documents/p2p/2004/scan.pdf - [Similar pages](#)

### [PDF] BitVault: a Highly Reliable Distributed Data Retention Platform

File Format: PDF/Adobe Acrobat - [View as HTML](#)

key is the handle to **retrieve** an **object**. Each **object** has a ... predecessor in the **logical** space. A **node** whose **zone**. covers an **object's** key (typically the ...

www.cs.utah.edu/classes/cs7460/papers/BitVault.pdf - [Similar pages](#)

### [PDF] PinS: Peer to Peer Interrogation and Indexing System

File Format: PDF/Adobe Acrobat

**Distributed Hash Table** systems. A DHT system splits a key space into zones and assigns. each **zone** to a **peer**. A key is a point in this space and the. **object** ...

doi.ieeecomputersociety.org/10.1109/IDEAS.2004.1319796 - [Similar pages](#)

### A Survey of Peer-to-Peer Content Distribution Technologies

To **insert** a new file in the network, the **node** first calculates a binary key for ... **object** location, routing and **distributed hash table** data structures and ...

www.spinellis.gr/pubs/jrnl/2004-ACMCS-p2p/html/AS04.html - 201k -

[Cached](#) - [Similar pages](#)

[PDF] [Untangling the Web from DNS](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

tative server for their own domain, and DNS **nodes** need. only serve requests for hosts or from users ... To **retrieve objects** using this kind of URL, the Web ...  
nms.csail.mit.edu/papers/sfr-nsdi04.pdf - [Similar pages](#)

[PDF] [A Session-Based Architecture for Internet Mobility](#) Mark Alexander ...

File Format: PDF/Adobe Acrobat

Naming systems use widely varied methods to store and **retrieve** name bindings. ... session between itself and an application running on the mobile **node**. ...  
nms.csail.mit.edu/~snoeren/papers/thesis/thesis.pdf - [Similar pages](#)

[PDF] [A Survey and Comparison of Peer-to-Peer Overlay Network Schemes](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

of initiating and routing client requests to **insert** or **retrieve** ... chosen. If FIND **NODE** fails to return a **peer** that is any closer, ...  
www.cl.cam.ac.uk/Teaching/2005/AdvSysTop/survey.pdf - [Similar pages](#)

[PDF] [ASCP - -PONS](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

connected to the Internet such that each **peer** is capable of ini- tiating and routing client requests to **insert** or **retrieve** files. ...  
www.cl.cam.ac.uk/~ekl25/lu.pdf - [Similar pages](#)

[PDF] [Querying the Internet with PIER](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The corresponding key-value pair is then stored at the **node** that owns the **zone** in which. point P lies. To **retrieve** an entry corresponding to a key k, ...  
www.mpi-inf.mpg.de/units/ag5/teaching/ws04\_05/Proseminar/2005-02-08\_Writeup1.pdf - [Similar pages](#)

[PPT] [Architectures and Algorithms for Internet-Scale \(P2P\) Data Management](#)

File Format: Microsoft Powerpoint - [View as HTML](#)

**Distributed Hash Table** (DHT). similar, but spread across the Internet. Interface. **insert** (key, value); lookup(key). How? Every DHT **node** supports a single ...  
db.cs.berkeley.edu/jmh/talks/vldb04-p2ptut-final.ppt - [Similar pages](#)

[PDF] [Architectures and Algorithms for Internet-Scale \(P2P\) Data ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Each **node** is assigned a **zone**. • **Nodes** are identified by **zone** boundaries ... Download one (random) chunk from a storage **peer**, slowly ...  
db.cs.berkeley.edu/jmh/talks/vldb04-p2ptut-2upbw.pdf - [Similar pages](#)  
[ [More results from db.cs.berkeley.edu](#) ]

[PDF] [Survey of Research towards Robust Peer-to-Peer Networks: Search ...](#)

File Format: PDF/Adobe Acrobat

**insert** message similarly steps towards the target **node**, ... **Distributed Hash Table**." Second International Workshop on **Peer-to-Peer** Systems (IPTPS 03), ...  
www.cs.umd.edu/projects/p2prg/p2p-overview.pdf - [Similar pages](#)

[PEER-TO-PEER RESEARCH GROUP J.Risson T.Moors Internet Draft ...](#)

The **insert** message similarly steps towards the target **node**, ... Tolerant **Distributed Hash Table**, Second Int'l Workshop on **Peer-to-Peer** Systems (IPTPS 03), ...  
www.ietf.org/internet-drafts/draft-irtf-p2prg-survey-search-00.txt - 215k -  
[Cached](#) - [Similar pages](#)

From kash Wed Feb 1 15:58:11 2006 Return-Path: <kash> Received ...  
 A **node** could try to join in a = specific **zone** to try and take over a specific ... a **distributed hash table** implementation designed for **peer-to-peer** file ...  
[www.cs.cornell.edu/People/egs/615/spring06-paper3.txt](http://www.cs.cornell.edu/People/egs/615/spring06-paper3.txt) - 102k - [Cached](#) - [Similar pages](#)

[PDF] Survey of Research towards Robust Peer-to-Peer Networks: Search ...  
 File Format: PDF/Adobe Acrobat - [View as HTML](#)  
**peer**. The **insert** message similarly steps towards the target **node**, ... and Efficient Data Management for a **Distributed Hash Table**, Master's Thesis, May 2003. ...  
[www.ee.unsw.edu.au/~timm/pubs/06compnet/submitted.pdf](http://www.ee.unsw.edu.au/~timm/pubs/06compnet/submitted.pdf) - [Similar pages](#)

[DOC] Professional Report  
 File Format: Microsoft Word - [View as HTML](#)  
 If the **peer** is being constantly queried, disk I/O's to **retrieve** data from ... This network is split into zones, with each **node** being responsible for a **zone**. ...  
[homepages.cs.ncl.ac.uk/john.colquhoun/docs/ThesisProposal.doc](http://homepages.cs.ncl.ac.uk/john.colquhoun/docs/ThesisProposal.doc) - [Similar pages](#)

[PDF] Query Processing in P2P Systems  
 File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 partitioning the **logical** key space among (many) peers ... send message m (eg a. plan) to **peer** responsible for. **zone** containing z ... **Insert** t. using h(t ...  
[wise.vub.ac.be/ifipwg26/wfw/app/files/685/17/Sattler.pdf](http://wise.vub.ac.be/ifipwg26/wfw/app/files/685/17/Sattler.pdf) - [Similar pages](#)

[PDF] IMMAHN  
 File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 We use a **distributed hash table** to index **nodes** that store information. ... **object** location and routing substrate for wide-area **peer-to-peer** applications. ...  
[www.utdallas.edu/~mmohsin/publications/InformationManagement.pdf](http://www.utdallas.edu/~mmohsin/publications/InformationManagement.pdf) - [Similar pages](#)

[PDF] Lecture-2 Content Sharing in P2P  
 File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 Interface. **insert**(key, value). value = **retrieve**(key). Properties. scalable ... multiple **nodes** per **zone** (**peer nodes**) ... Pastry: Scalable, distributed **object** ...  
[www.iipf.fudan.edu.cn/~zhousg/courses/adc-2006s/Lecture-2%20Content%20Sharing%20in%20P2P.pdf](http://www.iipf.fudan.edu.cn/~zhousg/courses/adc-2006s/Lecture-2%20Content%20Sharing%20in%20P2P.pdf) - [Similar pages](#)

[PDF] Distributed algorithms for balanced zone partitioning in content ...  
 File Format: PDF/Adobe Acrobat  
**peer** C). Consider an **object** held by a **node** in the system. To realize an efficient management of the ... manner; that is, to **retrieve** an **object** corresponding ...  
[ieeexplore.ieee.org/iel5/9197/29171/01316117.pdf?arnumber=1316117](http://ieeexplore.ieee.org/iel5/9197/29171/01316117.pdf?arnumber=1316117) - [Similar pages](#)

[PDF] Proceedings of the First Symposium on Networked Systems Design and ...  
 File Format: PDF/Adobe Acrobat  
 with the **object**. Content providers **insert** an **object's** meta-. data into the infrastructure and ... will **retrieve** content if references are human-unfriendly. ...  
[db.usenix.org/events/nsdi04/tech/full\\_papers/walfish/walfish.pdf](http://db.usenix.org/events/nsdi04/tech/full_papers/walfish/walfish.pdf) - [Similar pages](#)

[PDF] Querying the Internet with PIER  
 File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 In this paper, we present PIER (which stands for "Peer-. to-Peer Information Exchange and ... ing **nodes**. PIER is built on top of a **Distributed Hash Table** ...  
[www.vldb.org/conf/2003/papers/S11P01.pdf](http://www.vldb.org/conf/2003/papers/S11P01.pdf) - [Similar pages](#)

[PDF] Fusing Relational Databases and P2P: A Resource Sensitive DHT Overlay  
 File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 4.3 **Peer Node** Topologies used (see Figure 4.2 for **node** descriptors) . . . . which owns the

**zone** in which P lies. To **retrieve** an item the key is hashed, ...  
[www.inf.ed.ac.uk/publications/thesis/online/IM050248.pdf](http://www.inf.ed.ac.uk/publications/thesis/online/IM050248.pdf) - [Similar pages](#)

[DOC] [Model Cover Page for Deliverables](#)

File Format: Microsoft Word - [View as HTML](#)

The corresponding key-value pair is then stored at the **node** that owns the **zone** within which the point P lies. To **retrieve** an entry corresponding to key K, ...  
[edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2\\_0.doc](http://edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.doc) - [Similar pages](#)

[PDF] [DataGrid](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**logical** resource. Subsequent write to this data **object** will write to all data ... To **retrieve** an entry corresponding to key K, any **node** can apply the same ...  
[edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2\\_0.pdf](http://edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.pdf) - [Similar pages](#)

[PDF] [A Peer-to-Peer Filing System for Web Services](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The arriving **node** splits the **zone** in which its personal point ... mechanism, with an interface to **insert** and **retrieve** files from the network. Before the ...  
[www.cs.bath.ac.uk/~amb/CM30076/projects.bho/2003-4/GarethWesternDissertation.pdf](http://www.cs.bath.ac.uk/~amb/CM30076/projects.bho/2003-4/GarethWesternDissertation.pdf) - [Similar pages](#)

[irtf-p2prg-survey-search-00.txt](#)

For an overlay of 10000 **nodes**, they simulated the delay to **retrieve** tuples ... Fault Tolerant **Distributed Hash Table**, Second Int'l Workshop on **Peer-to-Peer** ...  
[ietfreport.isoc.org/idref/draft-irtf-p2prg-survey-search/](http://ietfreport.isoc.org/idref/draft-irtf-p2prg-survey-search/) - 238k - [Cached](#) - [Similar pages](#)

[PDF] [UNIVERSITY OF CALIFORNIA Santa Barbara Attribute-based Data Access ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

vide a **distributed hash table** (DHT) semantics where **objects** can be inserted ... **zone**. When querying for an **object**, a **peer** hashes the **object** name to obtain ...  
[www.cs.ucsb.edu/~dsl/publications/theses/AbhishekGuptaThesis.pdf](http://www.cs.ucsb.edu/~dsl/publications/theses/AbhishekGuptaThesis.pdf) - [Similar pages](#)

[PDF] [Bulletin of the Technical Committee on March 2005 Vol. 28 No. 1 ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

subset of sensor values and preferences to **retrieve**, and new action settings to ... network and provides facilities for locating the current **peer node** ...  
[sites.computer.org/debull/A05MAR-CD.pdf](http://sites.computer.org/debull/A05MAR-CD.pdf) - [Similar pages](#)

[PDF] [DDLs: Extending Open Hypermedia Systems into Peer-to-Peer Environments](#)

File Format: PDF/Adobe Acrobat

The servers, upon the receipt of requests, **retrieve** documents and send ... obtain a **zone** from the overall coordinate space, a new CAN **node** first discovers ...  
[eprints.ecs.soton.ac.uk/10917/01/TestThesis\\_submit.pdf](http://eprints.ecs.soton.ac.uk/10917/01/TestThesis_submit.pdf) - [Similar pages](#)

[H:/zz\\_phd/Phd/phd.dvi](#)

File Format: Unrecognized - [View as HTML](#)

A **node** (**Peer**) in such systems, acquires an identifier based on a cryptographic hash of some ... Koorde: A simple degree optimal **distributed hash table**. ...  
[www.sics.se/~sameh/download.php?target=pubs/2005/phd/phd.pdf](http://www.sics.se/~sameh/download.php?target=pubs/2005/phd/phd.pdf) - [Similar pages](#)

[PDF] [FLEXIBLE INFORMATION DISCOVERY WITH GUARANTEES IN DECENTRALIZED ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The overall architecture of Squid is a **distributed hash table** (DHT), ... An **insert** request for **object** A. originated at **node** x will update the pointer lists ...  
[www.caip.rutgers.edu/TASSL/Thesis/cristina-thesis.pdf](http://www.caip.rutgers.edu/TASSL/Thesis/cristina-thesis.pdf) - [Similar pages](#)

[PDF] [Digital Library Architectures:](#)

File Format: PDF/Adobe Acrobat

using a DHT (**Distributed Hash Table**) Overlay [2] and having unique IDs for different ...  
work of **nodes** that can **insert**, store, and **retrieve objects** using ...  
ii.umat.at/research/delos\_website/ISBN-88-87331-60-X\_delos-proceedings.pdf -  
[Similar pages](#)

[PDF] UNIVERSITY OF CALIFORNIA SANTA CRUZ DESIGN AND MANAGEMENT OF ...

File Format: PDF/Adobe Acrobat

that can **retrieve** different types of data and allow their sharing. ... Therefore, the benefit of  
placing an **object** at a certain cache **node** cannot be ...  
www.cs.ucsc.edu/~ari/Ari-PhD-Thesis.pdf - [Similar pages](#)

[PDF] Third International Workshop on Distributed Event-Based Systems

File Format: PDF/Adobe Acrobat

ized **Object** Location and Routing for Large-Scale **Peer-to-Peer** Systems. ... **insert node**  
into clist; //an ordered list wrt the cost metric ...  
www-serl.cs.colorado.edu/~carzanig/debs04/debs04proceedings.pdf - [Similar pages](#)

[PDF] Censorship-Resistant Communication over Public Networks

File Format: PDF/Adobe Acrobat - View as HTML

The rewebber network [105] uses onion-encrypted URLs to **retrieve** onion-encrypted ...  
Most **distributed hash table** designs assume that single **nodes** join a ...  
www.cs.ucl.ac.uk/staff/M.Rogers/transfer-report.pdf - [Similar pages](#)

[PDF] AN OBJECT-BASED SOFTWARE DISTRIBUTION NETWORK

File Format: PDF/Adobe Acrobat

**Retrieve** a copy of the state of the **object** from the core replica. ... DHash implements a  
**distributed hash table** that reliably stores blocks of ...  
www.cs.vu.nl/res/theses/bakker\_thesis.pdf - [Similar pages](#)

[PDF] An Approach to A Scalable Wide-Area Web Service

File Format: PDF/Adobe Acrobat

gateway) must bind to a GlobeDoc **object** in order to **retrieve** GlobeDoc content. Be- ... use  
of **peer-to-peer** networks and related **distributed hash table** ...  
www.cs.vu.nl/~ikuz/phd/thesis.pdf - [Similar pages](#)

Browse CITRIS Projects

The objective is not just to **retrieve** the most relevant document or text passage ... These  
proposals support a **Distributed Hash Table** (DHT) functionality in ...  
www.citris-uc.org/book/print/1202 - 348k - [Cached](#) - [Similar pages](#)

[PDF] Data Sharing and Information Retrieval in Wide-Area Distributed ...

File Format: PDF/Adobe Acrobat

**Distributed Hash Table** (DHT) to map a term to a **node** where the inverted list ... and part  
of the **zone** is given to D. When D wants to **retrieve** the **object** ...  
www.cs.rochester.edu/u/www/u/sarrmor/publications/tang-thesis.pdf - [Similar pages](#)

[PDF] Hermes: A Scalable Event-Based Middleware

File Format: PDF/Adobe Acrobat

Data **objects** (events) are published on a **logical** information bus that links pub- ...  
rendezvous **node** and **retrieve** the authoritative version of the schema. ...  
www.eecs.harvard.edu/~prp/doc/prp\_thesis.pdf - [Similar pages](#)

[PDF] Digital Library Architectures:

File Format: PDF/Adobe Acrobat

Building a metadata P2P indexing service, using a **Distributed Hash Table** (DHT), will ...  
work of **nodes** that can **insert**, store, and **retrieve objects** using ...  
dbis.cs.unibas.ch/.../D1.2.1%20-%20Proceedings%20I%20on%20Service%

20Architecture,%20P2P%20and%20Grid.pdf - [Similar pages](#)

### ATKSI - Glossary of Terms.

A pure **peer-to-peer** network does not have the notion of clients or servers, but only equal **peer nodes** that simultaneously function as both "clients" and ...

www.atksi.com/glossary.htm - 632k - [Cached](#) - [Similar pages](#)

[PDF] Boris Koldehofe DI FCUL TR 06 10 June 2006 Departamento de ...

File Format: PDF/Adobe Acrobat

**logical** ring, as shown in Figure 1. The **node** responsible for ... tralized **object** location, and routing for large-scale **peer-to-peer** systems. ...

www.di.fc.ul.pt/tech-reports/06-10.pdf - [Similar pages](#)

[PDF] 2005 First Workshop on Secure Network Protocols (NPSec)

File Format: PDF/Adobe Acrobat

Approximate **object**-location and Spam filtering on **peer-to-peer** systems. ... available, through which a **node** is able to **retrieve** the ...

www.ieee-icnp.org/2005/NPsec.pdf - [Similar pages](#)

[PDF] Paper Summaries

File Format: PDF/Adobe Acrobat

If a user cannot find a way to **retrieve** the needed data, then the data is ... PIER relies on a **distributed hash table** (DHT) over participating **nodes** ...

berkeley.intel-research.net/maniatis/bibliography.pdf - [Similar pages](#)

[PDF] D 4.3 Mobility Framework & Mechanisms - Annex

File Format: PDF/Adobe Acrobat

Link disappears (due to shut down of the **peer node** for example) ... process to **insert** location information. When locating an **object**, Tapestry performs the ...

www.ambient-networks.org/publications/

D4\_3\_Mobility\_Framework\_&\_Mechanisms\_Annex\_PU.pdf - [Similar pages](#)

[PDF] : a new overlay network based on CAN and Chord

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**distributed hash table**. Each CAN **node** stores a part (called. a **zone**) of the hash table, ...

Lemma 1: In **logical** overlay, given a **peer** P and a key K, ...

homepage.fudan.edu.cn/~wnqian/publications/IJHPCN.pdf - [Similar pages](#)

[PDF] XXV Auto-ID

File Format: PDF/Adobe Acrobat

can be either a **logical object** which is a collection. of digital information (such as two digits, ... tion **node(s)**. In other words, IP address space is ...

www.wide.ad.jp/project/document/reports/pdf2003/part25.pdf - [Similar pages](#)

[PDF] SNUP -T -PN

File Format: PDF/Adobe Acrobat

**peer**. For its **zone** the **peer** knows the P2P overlay network topology and the ... As in Chord, in Pastry every **node** and every **object** is described uniquely by ...

tumb1.biblio.tu-muenchen.de/publ/diss/ei/2005/schollmeier.pdf - [Similar pages](#)

[PDF] Project Number: Project Title: Simplicity Deliverable Type: PU ...

File Format: PDF/Adobe Acrobat

Necessary to store and **retrieve** user preferences and other ... A **node** can. **insert** an **object** into PAST, which will be stored in a number of copies into the ...

server.ist-simplicity.org/download.php?OID=164400&FILENAME=D2101-Use%20cases,%20requirements%20and%20... - [Similar pages](#)

[PDF] MoSAIC: Mobile System Availability Integrity and Confidentiality

File Format: PDF/Adobe Acrobat - [View as HTML](#)

When a reader wishes to **retrieve** a document from the servnet, he ... **object** location and routing for large-scale **peer-to-peer** systems. ...

[www2.laas.fr/mosaic/documents/MoSAlC-report-20060703.pdf](http://www2.laas.fr/mosaic/documents/MoSAlC-report-20060703.pdf) - [Similar pages](#)

[Digital Commons: Browse by Resource Type](#)

Abstract: A **peer-to-peer** (p2p) **distributed hash table** (DHT) system allows ... and fail silently (or leave), as well as to **insert** and **retrieve** les (**objects**). ...

[digitalcom.thei3p.org/library/browse\\_by\\_type.html?type-id=1001](http://digitalcom.thei3p.org/library/browse_by_type.html?type-id=1001) - 845k -

[Cached](#) - [Similar pages](#)

[PDF] [SoS: Self-organizing Substrates](#)

File Format: PDF/Adobe Acrobat

To **retrieve** an **object** a query to search the **object** is ... A Query-Adaptive Partial **Distributed Hash Table** for **Peer-** to-**Peer** Systems. ...

[lsirpeople.epfl.ch/datta/ThesisDraft/Thesis.pdf](http://lsirpeople.epfl.ch/datta/ThesisDraft/Thesis.pdf) - [Similar pages](#)

[PDF] [Decentralized Object Location and Routing: A New Networking ...](#)

File Format: PDF/Adobe Acrobat

OceanStore **node** should be able to locate and **retrieve** a file replica if such a ... The **Distributed Hash Table** (DHT) API is a simple and well understood ...

[oceanstore.cs.berkeley.edu/publications/papers/pdf/zhao.pdf](http://oceanstore.cs.berkeley.edu/publications/papers/pdf/zhao.pdf) - [Similar pages](#)

[Multiplex communications patents 200506](#)

A **node** and four IP-STPs belong to a **logical** network A identified by a ... **Peer-to-peer** system and method with prefix-based **distributed hash table**: An ...

[www.freshpatents.com/Multiplex-communications-dt200506ntc370.php](http://www.freshpatents.com/Multiplex-communications-dt200506ntc370.php) - 423k -

[Cached](#) - [Similar pages](#)

[PDF] [EFFECTIVE BOOTSTRAPPING OF PEER-TO-PEER NETWORKS OVER MOBILE AD ...](#)

File Format: PDF/Adobe Acrobat

**Insert** function stores a (key, value) pair at the **node** responsible for the key. Lookup function returns value. associated with a key from a **peer**. ...

[etd.lsu.edu/docs/available/etd-07132006-055232/unrestricted/Dissertation.pdf](http://etd.lsu.edu/docs/available/etd-07132006-055232/unrestricted/Dissertation.pdf) -

[Similar pages](#)

00:00:00 --- log: started lisp/06.02.10 00:00:11 <cliini> Ah, it ...

I can't think of a sane behavior for user **objects**, though. ... 18:38:05 <papasi> i was wondering if i can **retrieve** that same information from lisp 18:38:20 ...

[tunes.org/~nef/logs/lisp/06.02.10](http://tunes.org/~nef/logs/lisp/06.02.10) - 191k - [Cached](#) - [Similar pages](#)

[PDF] [A Distributed Publish/Subscribe Notification Service for Pervasive ...](#)

File Format: PDF/Adobe Acrobat

ical space and computing **nodes** is softend. Physical **objects** can serve ... on top of a **distributed hash table**; the common data structure for **peer-to-peer** ...

[elib.tu-darmstadt.de/diss/000519/thesisFinal.pdf](http://elib.tu-darmstadt.de/diss/000519/thesisFinal.pdf) - [Similar pages](#)

[PDF] [D3.1.1: State of the Art and Technology Watching Plan](#)

File Format: PDF/Adobe Acrobat

**zone** into two equal parts and assigns one of the halves to the new **node**. ... know what we want to **retrieve** and which **peer** is able to provide that ...

[www.brickcommunity.org/discussion\\_area/reports/D311-StateOfTheArt.pdf/download](http://www.brickcommunity.org/discussion_area/reports/D311-StateOfTheArt.pdf/download) -

[Similar pages](#)

[PDF] [Query Evaluation Techniques for Data Integration Systems](#)

File Format: PDF/Adobe Acrobat

into **distributed hash table**-based approaches and techniques based on distributed rout- ... torus), where each **node** owns a distinct **zone**. ... **insert** c into C ...

[www.opus-bayern.de/uni-passau/volltexte/2004/40/pdf/QETechniquesForDISystems.pdf](http://www.opus-bayern.de/uni-passau/volltexte/2004/40/pdf/QETechniquesForDISystems.pdf) - [Similar pages](#)

[PDF] [Certified by.....](#)

File Format: PDF/Adobe Acrobat

SFR uses a **distributed hash table** (DHT) to map semantic-free 160-bit strings, ... To **retrieve objects** using this kind of URL, the Web browser uses the SFR ...  
<https://dspace.mit.edu/bitstream/1721.1/28733/1/59667380.pdf> - [Similar pages](#)

[PDF] [Designs and Analyses in Structured Peer-to-Peer Systems](#)

File Format: PDF/Adobe Acrobat

11 wants to **insert** a new item with id 8, the lookup is forwarded to **node** ... optimal **distributed hash table**. In 2nd International Workshop on **Peer-** ...  
[eprints.sics.se/163/01/phd.pdf](http://eprints.sics.se/163/01/phd.pdf) - [Similar pages](#)

[PDF] [The Host Identity Protocol](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

When a **peer node** receives a LOCATOR parameter it will verify the reachability of ...  
 OpenDHT is a public accessible **Distributed Hash Table** (DHT) service. ...  
[kom.aau.dk/group/05gr680/report/report.pdf](http://kom.aau.dk/group/05gr680/report/report.pdf) - [Similar pages](#)

[FreeBSD Ports Collection Index](#)

dbtool-1.6\_1 -- Store and **retrieve** data in a key/value format in a hash database ... p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...  
[www.freebsd.org/ports/master-index.html](http://www.freebsd.org/ports/master-index.html) - [Similar pages](#)

[DOC] [Model Cover Page for Deliverables](#)

File Format: Microsoft Word - [View as HTML](#)

Each CAN **node** stores a chunk (**zone**) of the entire hash table and holds information about a small number of "adjacent" zones in the table. Requests to **insert** ...  
[eu-datagrid.web.cern.ch/.../2-DataGrid-1Y-EU-Deliverables/FirstYearDeliverables/d2.1/D2.1-v3.2.doc](http://eu-datagrid.web.cern.ch/.../2-DataGrid-1Y-EU-Deliverables/FirstYearDeliverables/d2.1/D2.1-v3.2.doc) - [Similar pages](#)

[PDF] [Better Anonymous Communications](#)

File Format: PDF/Adobe Acrobat

dynamic nature of **peer-to-peer** networks, and the volatility of **nodes**. On ... The request phase is then used by Alice to **retrieve** her email from the ...  
[freehaven.net/anonbib/cache/george-thesis.pdf](http://freehaven.net/anonbib/cache/george-thesis.pdf) - [Similar pages](#)

[PDF] [NCCR: 4 Progress Report – Shortened version](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

describe services provided by the **nodes** in a **peer to peer** system. ... Distributed Component **Object Model**. DHT. **Distributed Hash Table** ...  
[www.mics.org/Annexes/report-y4-short.pdf](http://www.mics.org/Annexes/report-y4-short.pdf) - [Similar pages](#)

[PDF] [AN OBJECT-BASED SOFTWARE DISTRIBUTION NETWORK](#)

File Format: PDF/Adobe Acrobat

tributed **object** as a **logical** unit that is physically distributed over multiple ... DHash implements a **distributed hash table** that reliably stores blocks of ...  
[globule.cs.vu.nl/~arno/Publications/dissertation.pdf](http://globule.cs.vu.nl/~arno/Publications/dissertation.pdf) - [Similar pages](#)

[PDF] [Proceedings](#)

File Format: PDF/Adobe Acrobat

When a **peer** wants to **insert** a new **object**, it first consults its local AST, ... neighbors (or **logical** neighbors). The domain of a **node** includes all its ...  
[people.csail.mit.edu/wolfgang/papers/ICDE-EDBT.pdf](http://people.csail.mit.edu/wolfgang/papers/ICDE-EDBT.pdf) - [Similar pages](#)

[Rejstřík kolekce portů FreeBSD](#)



biosfont-1.0 - Kernel module to **retrieve** bitmap fonts from BIOS memory ... p5-DateTime-TimeZone-0.46 - Time **zone object** base class and factory ...  
[www.freebsd.cz/cs/ports/master-index.html](http://www.freebsd.cz/cs/ports/master-index.html) - [Similar pages](#)

### Current Internet-Drafts This summary sheet provides a short ...

A number of DHT (**Distributed Hash Table**) P2P protocols that solve some similar ...  
 managed **objects** for information related to a Fibre Channel **Zone Server**. ...  
[free.vlsm.org/ID/1id-abstracts.txt](http://free.vlsm.org/ID/1id-abstracts.txt) - [Similar pages](#)

### FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-DateTime-TimeZone-0.40 -- Time **zone object** base class and factory ...  
[freebsd.plig.org/ports/master-index.html](http://freebsd.plig.org/ports/master-index.html) - [Similar pages](#)

### [PDF] Architecture, protocols and services

File Format: PDF/Adobe Acrobat

**Objects** in the Fresnel **zone** cause diffraction and hence ... **distributed hash table** (DHT), in which **nodes** are assigned a unique pseudo-random identifier that ...  
[cnd.iit.cnr.it/mobileMAN/deliverables/MobileMAN\\_Deliverable\\_D5.pdf](http://cnd.iit.cnr.it/mobileMAN/deliverables/MobileMAN_Deliverable_D5.pdf) - [Similar pages](#)

### [PDF] NIRA: A New Internet Routing Architecture

File Format: PDF/Adobe Acrobat

(NRLS) that facilitates a sender to **retrieve** a destination's route ... based on the distances of these **nodes** to **node** m in the **logical** geometry structure. ...  
[www.lcs.mit.edu/publications/pubs/pdf/MIT-LCS-TR-967.pdf](http://www.lcs.mit.edu/publications/pubs/pdf/MIT-LCS-TR-967.pdf) - [Similar pages](#)

### [PDF] NASA/IEEE MSST 2004 Twelfth NASAGoddard Conference on Mass Storage ...

File Format: PDF/Adobe Acrobat

a **zone**, with its own metadata catalog managing the **logical** name spaces ... **retrieve** the stripe data from the relevant **nodes** before generating the parity. ...  
[ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20040121020\\_2004117345.pdf](http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20040121020_2004117345.pdf) - [Similar pages](#)

### FreeBSD Ports Collection Index

biosfont-1.0 -- Kernel module to **retrieve** bitmap fonts from BIOS memory ... p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...  
[www.ca.freebsd.org/ports/master-index.html](http://www.ca.freebsd.org/ports/master-index.html) - [Similar pages](#)

### FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...  
[www.fi.freebsd.org/ports/master-index.html](http://www.fi.freebsd.org/ports/master-index.html) - [Similar pages](#)

### FreeBSD Ports Collection 一覽 - [ Translate this page ]

jigdo-0.7.3 -- A utility used to **retrieve** very large files over the Internet ... p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ...  
[www.fi.freebsd.org/ja/ports/master-index.html](http://www.fi.freebsd.org/ja/ports/master-index.html) - [Similar pages](#)

### Software :: Betas.Intercom.Net :: News and betas from a different ...

eXeem™ is a brand new **Peer-To-Peer** program, which is based on the BitTorrent idea. eXeem™ eliminates the need for trackers as **nodes** in the program will be ...  
[betas.intercom.net/index.php?name=News&catid=&topic=19&allstories=1](http://betas.intercom.net/index.php?name=News&catid=&topic=19&allstories=1) - [Similar pages](#)

### FreeBSD Ports Collection Index

glbsp-2.10c -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-DateTime-TimeZone-0.36 -- Time **zone object** base class and factory ...  
[www.pl.freebsd.org/ports/master-index.html](http://www.pl.freebsd.org/ports/master-index.html) - [Similar pages](#)

From nhodgson at bigpond.net.au Sun Aug 1 00:27:40 2004 From ...

Needs: - high redundancy - high probability of being able to **retrieve** data even if (say) 30% of **nodes** are down - pure-python implementation - **peer to peer** ...  
mail.python.org/pipermail/python-list/2004-August.txt - [Similar pages](#)

[PDF] A Session-Based Architecture for Internet Mobility Mark Alexander ...

File Format: PDF/Adobe Acrobat

send packets destined for a mobile **node** to its home address on its home network, ...

Naming systems use widely varied methods to store and **retrieve** name ...

nms.lcs.mit.edu/papers/thesis\_snoeren.pdf - [Similar pages](#)

RPM shipped by Mandriva

DNSSEC-Walker-3.5-3mdv2007.0.noarch, **Retrieve** a DNS **zone** using NXT traversal ...

Module to access the Open **Distributed Hash Table** (Open DHT) ...

rpmfind.net/linux/RPM/mandriva/devel/cooker/amd64/media/contrib/Mandriva.html -

[Similar pages](#)

FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-

DateTime-TimeZone-0.42 -- Time **zone object** base class and factory ...

www2.de.freebsd.org/ports/master-index.html - [Similar pages](#)

Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...

dht - **distributed hash table** - se distribuerad kondensattabell. .... fuzzy **logic** - graderad

logik, mjuk logik - logiskt system som hanterar mellanlägen ...

cstjanster.idg.se/sprakwebben/ord.asp?ord=ord - [Similar pages](#)

Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...

blob - binary large **object**. En mycket stor fil, till exempel en bild, videosnutt eller ... dht -

**distributed hash table** - se distribuerad kondensattabell. ...

cstjanster.idg.se/sprakwebben/ord.asp?ord=OR - [Similar pages](#)

FreeBSD Ports Collection 一覽 - [ Translate this page ]

p5-DateTime-TimeZone-0.46 -- Time **zone object** base class and factory ... p5-Net-

OpenDHT-0.33 -- Access the Open **Distributed Hash Table** (Open DHT) ...

www.de.freebsd.org/ja/ports/master-index.html - [Similar pages](#)

Get Real: Stowe Boyd's Soapbox

A clever protocol, based on a Kademlia **distributed hash table** or "DHT", allows clients to efficiently store and **retrieve** contact information for peers in a ...

getreal.corante.com/archives/technology/ - [Similar pages](#)


*In order to show you the most relevant results, we have omitted some entries very similar to the 93 already displayed.*

*If you like, you can repeat the search with the omitted results included.*

Did you mean to search for: insert **retrieve** object node **logic** zone peer "distributed hash table"

Try your search again on [Google Book Search](#)

See all your photos right in your Sidebar.  
Free! [Download Google Desktop](#).

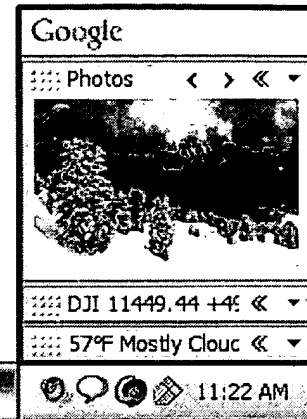


insert retriev object node logical zon

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2006 Google

[Sign in](#)

**Web** Results 1 - 100 of about 425 for insert retriev object node logical space peer "distributed hash table"

Did you mean: insert **retrieve** object node logical space peer "distributed hash table"

[PDF] P2P Systems Based on Distributed Hash Table

File Format: PDF/Adobe Acrobat - [View as HTML](#)

A **peer-to-peer** system (P2P) is formed by a large number of **nodes** that ... **objects** in the thesis. Name **space** refers to a set of names in which all names are ...

[www.site.uottawa.ca/~mxie/academic/bak/DHT.pdf](http://www.site.uottawa.ca/~mxie/academic/bak/DHT.pdf) - [Similar pages](#)

[PDF] A Distributed Persistent Object Store for Scalable Service ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

If the service instance and **Peer-Server** are running on the same **node**, which is often ... TODS provides several ways to **retrieve objects** from the store. ...

[www.cs.berkeley.edu/~zf/papers/tods-osreview.pdf](http://www.cs.berkeley.edu/~zf/papers/tods-osreview.pdf) - [Similar pages](#)

[PDF] TODS: Cluster Object Storage Platform Designed for Scalable Services

File Format: PDF/Adobe Acrobat - [View as HTML](#)

explicitly **retrieve** every **object** they use and have to call a method to notify the update of an ... **nodes**. All test programs connect to local **Peer Servers** ...

[www.cs.berkeley.edu/~zf/papers/zf-jc-tods-ica3pp.pdf](http://www.cs.berkeley.edu/~zf/papers/zf-jc-tods-ica3pp.pdf) - [Similar pages](#)

[ More results from [www.cs.berkeley.edu](http://www.cs.berkeley.edu) ]

[PDF] Towards a Common API for Structured Peer-to-Peer Overlays

File Format: PDF/Adobe Acrobat - [View as HTML](#)

and **retrieve** functionality, where the value is always stored at the live overlay **node(s)** to which the key is mapped by the KBR layer. Values can be **objects** ...

[pdos.csail.mit.edu/papers/iptps:apis/main.pdf](http://pdos.csail.mit.edu/papers/iptps:apis/main.pdf) - [Similar pages](#)

[PDF] Chord: A Scalable Peer-to-peer Lookup Protocol for Internet ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**insert** and **retrieve** data blocks identified with unique keys. ... The **distributed hash table** uses Chord to identify the **node** responsible for storing a block ...

[pdos.csail.mit.edu/chord/papers/paper-ton.pdf](http://pdos.csail.mit.edu/chord/papers/paper-ton.pdf) - [Similar pages](#)

[ More results from [pdos.csail.mit.edu](http://pdos.csail.mit.edu) ]

[PDF] CS603: Distributed Systems

File Format: PDF/Adobe Acrobat - [View as HTML](#)

the **node S** responsible for k. I. **Retrieve object** from **node S** ... **successor(k)** = first **node** whose ID is  $\geq$  ID of k in identifier **space** ...

[homes.cerias.purdue.edu/~crisn/courses/cs603\\_Spring\\_2006/cs603\\_lect17and18.pdf](http://homes.cerias.purdue.edu/~crisn/courses/cs603_Spring_2006/cs603_lect17and18.pdf) -

[Similar pages](#)

[PDF] CLASH: A Protocol for Internet-Scale Utility-Oriented Distributed ...

File Format: PDF/Adobe Acrobat

any leaf **node** of the **logical** tree corresponds to a unique ... distributed **object** location and routing for large-scale **peer-to-peer** systems, ...

[doi.ieeecomputersociety.org/10.1109/ICDCS.2004.1281592](http://doi.ieeecomputersociety.org/10.1109/ICDCS.2004.1281592) - [Similar pages](#)

[PDF] PinS: Peer to Peer Interrogation and Indexing System

File Format: PDF/Adobe Acrobat

**Distributed Hash Table** systems. A DHT system splits a key **space** into zones and assigns. each zone to a **peer**. A key is a point in this **space** and the. **object** ...  
doi.ieeecomputersociety.org/10.1109/IDEAS.2004.1319796 - [Similar pages](#)

[PDF] [Towards a Common API for Structured Peer-to-Peer Overlays](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

bors of the local **node** in the ID **space**. Up to num **node** ... To **insert** a trigger ... **object** location and routing for large-scale **peer-to-peer** systems. In ...  
www.cs.rice.edu/~druschel/publications/kbr-api.pdf - [Similar pages](#)

[PDF] [Multicast in DKS\(N, k, f\) Overlay Networks](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

8], that **nodes** of a DKS(N, k, f) and **objects** managed by these **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...  
dks.sics.se/pub/mcast.pdf - [Similar pages](#)

[PDF] [A Framework For The Understanding, Optimization and Design Of ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

tures [6, 5], that **nodes** of a DKS(N, k, f) and **objects** managed by these **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...  
dks.sics.se/pub/lic-kary.pdf - [Similar pages](#)  
[ [More results from dks.sics.se](#) ]

From kash Mon Jan 30 17:57:34 2006 Return-Path: <kash> Received ...

However, Tapestry also associates an epoch with **node/object** association ... are all similar **peer to peer** networks, based on a **Distributed Hash Table** (DHT). ...  
www.cs.cornell.edu/People/egs/615/spring06-paper2.txt - 93k - [Cached](#) - [Similar pages](#)

From kash Wed Feb 1 15:58:11 2006 Return-Path: <kash> Received ...

To route an **object** lookup, a **node** need only calculate a line from itself to the ... The way it works is by splitting the **space** represented as a **logical** ...  
www.cs.cornell.edu/People/egs/615/spring06-paper3.txt - 102k - [Cached](#) - [Similar pages](#)  
[ [More results from www.cs.cornell.edu](#) ]

[PDF] [An API for Easy and Reliable Deployment of Structured Peer-to-Peer ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

our **distributed hash table** and decentralized **object** loca- tion and routing implementations. ... coordinate **space** with keys which are mapped to the **node** ...  
www.cse.ucsc.edu/~aleung/api.pdf - [Similar pages](#)

[PDF] [MS Word template for A4 size paper](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**space** among a set of **peer nodes** (eg, the use of. "virtual servers" in [17]). ... semantics used to store and **retrieve objects** in a DHT. ...  
www.research.ibm.com/people/a/archan/icdcs2004-draft.pdf - [Similar pages](#)

[PDF] [Distributed Segment Tree: Support of Range Query and Cover Query ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**nodes** (in parallel to shorten the latency) could **retrieve** the ... distributed **object** location and routing for large-scale. **peer-to-peer** systems," in ...  
iptps06.cs.ucsb.edu/papers/Zheng-DST06.pdf - [Similar pages](#)

[PDF] [BitVault: a Highly Reliable Distributed Data Retention Platform](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

key is the handle to **retrieve** an **object**. Each **object** has a ... predecessor in the **logical space**. A **node** whose zone. covers an **object's** key (typically the ...  
www.cs.utah.edu/classes/cs7460/papers/BitVault.pdf - [Similar pages](#)

[PDF] Data-Centric Storage in Sensornets with GHT, A Geographic Hash TableFile Format: PDF/Adobe Acrobat - [View as HTML](#)data **object** is associated with a key and each **node** in the ... because neighbors in the DHT **logical** identifier **space** may be ...[www.isi.edu/div7/publication\\_files/data\\_centric\\_storage.pdf](http://www.isi.edu/div7/publication_files/data_centric_storage.pdf) - [Similar pages](#)[PDF] Supporting efficient keyword-based file search in peer-to-peer ...File Format: PDF/Adobe Acrobat - [View as HTML](#)**node** information in the **logical** ring and forwards the message. to the next **node**. ... **object** address and routing for large-scale **peer-to-peer** systems," ...[www.fulton.asu.edu/embedded/temp/other/ryu.pdf](http://www.fulton.asu.edu/embedded/temp/other/ryu.pdf) - [Similar pages](#)[PDF] Induced Churn as Shelter from Routing-Table PoisoningFile Format: PDF/Adobe Acrobat - [View as HTML](#)ing a neighborhood of the **logical** overlay **space** collectively. to decide the order of **peer** ... **object** location and routing for large-scale **peer-to-peer** sys- ...[www.isoc.org/isoc/conferences/ndss/](http://www.isoc.org/isoc/conferences/ndss/)06/proceedings/html/2006/papers/churn\_as\_shelter.pdf - [Similar pages](#)[DOC] 1File Format: Microsoft Word - [View as HTML](#)It essentially pools unused disk **space** in **peer** computers to create a collaborative ... To **retrieve** the entry corresponding to K, any **node** can apply the same ...[www.srdc.metu.edu.tr/webpage/projects/artemis/documents/D3.1.1.3-SOAv1.1\\_P2P-2.doc](http://www.srdc.metu.edu.tr/webpage/projects/artemis/documents/D3.1.1.3-SOAv1.1_P2P-2.doc) -[Similar pages](#)[PDF] GridVine: Building Internet-Scale Semantic Overlay NetworksFile Format: PDF/Adobe Acrobat - [View as HTML](#)**Insert**(key, value). **Retrieve**(key) **Return**(value). **Logical** Layer ... Each **peer** is responsible for some part of. the overall key **space** and maintains additional ...[icwww.epfl.ch/publications/documents/IC\\_TECH\\_REPORT\\_200438.pdf](http://icwww.epfl.ch/publications/documents/IC_TECH_REPORT_200438.pdf) - [Similar pages](#)Data overlay, self-organized metadata overlay, and associated ...The resultant partitions define **logical** spaces used to **insert** and **retrieve objects** into and from the **distributed hash table**. A **node** can be said to "own" the ...[www.freshpatents.com/Data-overlay-self-organized-metadata-overlay-and-associated-methods-dt20050825ptan20...](http://www.freshpatents.com/Data-overlay-self-organized-metadata-overlay-and-associated-methods-dt20050825ptan20...) - 33k - [Cached](#) - [Similar pages](#)Data overlay, self-organized metadata overlay, and associated ...The DHT **nodes** collectively define an abstract DHT **logical space** . ...spaces used to **insert** and **retrieve objects** into and from the **distributed hash table** . ...[www.freshpatents.com/Data-overlay-self-organized-metadata-overlay-and-associated-methods-dt20050825ptan20...](http://www.freshpatents.com/Data-overlay-self-organized-metadata-overlay-and-associated-methods-dt20050825ptan20...) - 72k - Supplemental Result - [Cached](#) - [Similar pages](#)[PDF] A Scalable Semantic Indexing Framework for Peer-to-Peer ...File Format: PDF/Adobe Acrobat - [View as HTML](#)to routing to the **node** that hosts the **object**. Routing translates to. traversing from one zone to another in the Cartesian **space**. ...[hdr2005.isti.cnr.it/camera-ready/7.Chen.pdf](http://hdr2005.isti.cnr.it/camera-ready/7.Chen.pdf) - [Similar pages](#)A Survey of Peer-to-Peer Content Distribution TechnologiesTo **insert** a new file in the network, the **node** first calculates a binary key for ... **object** location, routing and **distributed hash table** data structures and ...[www.spinellis.gr/pubs/jrnl/2004-ACMCS-p2p/html/AS04.html](http://www.spinellis.gr/pubs/jrnl/2004-ACMCS-p2p/html/AS04.html) - 201k -[Cached](#) - [Similar pages](#)P2P Networks

During the publishing process described previously the roots are used to **insert** location information into the **nodes**. **Objects** stored at regular intervals ...  
 ntrg.cs.tcd.ie/undergrad/4ba2.02-03/p9.html - 54k - [Cached](#) - [Similar pages](#)

[PDF] [A Survey and Comparison of Peer-to-Peer Overlay Network Schemes](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

to the set of peers into a large **space** of identifiers. Data **objects** ... of initiating and routing client requests to **insert** or **retrieve** ...

www.cl.cam.ac.uk/Teaching/2005/AdvSysTop/survey.pdf - [Similar pages](#)

[PDF] [ASCP - -PONS](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

completely **logical**. The entire coordinate **space** is dynamically ... name to **retrieve** a bootstrap **peer**'s IP address, similar to the ...

www.cl.cam.ac.uk/~ekl25/luu.pdf - [Similar pages](#)

[PPT] [P2P lecture](#)

File Format: Microsoft Powerpoint - [View as HTML](#)

Chord **Logical** Structure. m-bit ID **space** (2m IDs), usually m=160. Think of **nodes** as organized in a **logical** ring according to their IDs. ...

webcourse.cs.technion.ac.il/236370/Spring2006/ho/WCFiles/P2P\_lecture-CDP.ppt -

[Similar pages](#)

[PDF] [LNCS 2920 - Design of a Secure Distributed Service Directory for ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

this virtual **space** CAN-space. The coordinate **space** is completely **logical** and has ... To **retrieve** an entry, corresponding to a key K, any **node** can apply the ...

i30www.ira.uka.de/research/documents/p2p/2004/scan.pdf - [Similar pages](#)

[PDF] [Deliverable D2.3.1 Requirements for a P2P platform for dynamic ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Each **node** in the Pastry **peer-to-peer** overlay network is assigned a 128-bit **node** ... The storage component permits to **insert** and **retrieve** files to **nodes** ...

delis.upb.de/deliverables/D2.3.1.pdf - [Similar pages](#)

[PDF] [Mercury: Supporting Scalable Multi-Attribute Range Queries](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

ensures that queries **retrieve** all relevant data items present. in the system. ... the attribute **space** was Zipf-distributed. The **node-range** ...

www.eecs.harvard.edu/~memu/courses/cs264/papers/mercury-sigcomm2004.pdf -

[Similar pages](#)

[PDF] [Hourglass: An Infrastructure for Connecting Sensor Networks and ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

intermediate **nodes**. **Nodes** in the circuit can refer to Hourglass ... backing scheme is a **distributed hash table**, one can imagine the ...

www.eecs.harvard.edu/~prp/doc/tr-21-04.pdf - [Similar pages](#)

[PDF] [A Unified Peer-to-Peer Database Framework](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

connects directly to a subset of these **nodes** to query and **retrieve** result sets' ... the theme of **distributed hash table** lookup. Note further that almost no ...

dsd.lbl.gov/~hoschek/publications/jpdc2002-1.pdf - [Similar pages](#)

[PDF] [A UNIFIED PEER-TO-PEER DATABASE FRAMEWORK FOR XQUERIES OVER ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Unified **Peer-to-Peer** Database Framework (UPDF). The related but orthogonal concepts of

(**logical**) link topology and (physical) **node** deploy- ...  
 dsd.lbl.gov/~hoschek/publications/phd2002-hoschek.pdf - [Similar pages](#)  
[\[ More results from dsd.lbl.gov \]](#)

[PDF] [A Decentralized Computational Infrastructure for Grid-Based ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

be associatively accessed by all **peer nodes** without ... uses the tuple **space** abstractions to **retrieve** tasks. and exchange borders. ...

www.caip.rutgers.edu/TASSL/Papers/cometGrid2006.pdf - [Similar pages](#)

[PDF] [FLEXIBLE INFORMATION DISCOVERY WITH GUARANTEES IN DECENTRALIZED ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The overall architecture of Squid is a **distributed hash table** (DHT), ... An **insert** request for **object** A. originated at **node** x will update the pointer lists ...

www.caip.rutgers.edu/TASSL/Thesis/cristina-thesis.pdf - [Similar pages](#)

[PDF] [Query Processing in P2P Systems](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**distributed hash table**: provides two operations ... partitioning the **logical** key **space** among (many) peers ... **Insert** t. using h(t) ...

wise.vub.ac.be/ifipwg26/wfw/app/files/685/17/Sattler.pdf - [Similar pages](#)

[PDF] [Querying the Internet with PIER](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

coordinate **space** is completely **logical** and is not related to any physical ... To **retrieve** an entry corresponding to a key k, any **node** can apply the same ...

www.mpi-inf.mpg.de/units/ag5/teaching/ws04\_05/Proseminar/2005-02-08\_Writeup1.pdf -

[Similar pages](#)

[PDF] [Semantic file Systems](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**peer** Internet application. The PAST system is composed of **nodes** connected to the ... initiating and routing clients requests to **insert** or **retrieve** files. ...

etna.int-evry.fr/~bernard/ASR/04-05/projets/systeme-fichiers-semantic/systeme-fichiers-semantic.pdf - [Similar pages](#)

[DOC] [Introduction](#)

File Format: Microsoft Word - [View as HTML](#)

2.2.3 Motivation for developing a decentralised **peer** to **peer** tuple **space** ... This, is handled accordingly, by the **distributed hash table**, if a Chord **node** ...

www.lanacs.ac.uk/ug/kirrage/final.doc - [Similar pages](#)

[PDF] [Caret - A Peer to Peer Computer Aided Requirements Engineering Toolset](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**peer** to **peer** engines, such as Freenet use a **distributed hash table** in order to in- ... The result is that the **peer** attempts to **insert objects** ...

www.lanacs.ac.uk/postgrad/stonea1/caret\_downloads/caret.pdf - [Similar pages](#)

[PDF] [Peer-to-Peer Networks](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**peer-to-peer** overlay network is assigned a 128-bit **node** identifier (nodeID). The nodeID is used to indicate a **node's** position in a circular nodeID **space**, ...

www.cse.fau.edu/~jie/research/publications/Publication\_files/handbook-part3.pdf -

[Similar pages](#)

[PDF] [Mercury: Supporting Scalable Multi-Attribute Range Queries](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)



This ensures that queries **retrieve** all relevant data items present in. the system. ... This partition is only **logical**, ie, a physical **node** can be part of ...  
[www.it.uom.gr/mpiweb/peerTopeer/Papers/Mercury2.pdf](http://www.it.uom.gr/mpiweb/peerTopeer/Papers/Mercury2.pdf) - [Similar pages](#)

[PDF] [DELOS WP 1 Survey](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

In general, GHT\* consists of network **nodes**, peers, that can **insert**, store, and **retrieve objects**. using similarity queries. The GHT\* architecture assumes ...  
[dbis.cs.unibas.ch/delos\\_website/D1.1.1%20-%20Evaluation%20and%20Comparison%20of%20the%20Service%20Archite...](http://dbis.cs.unibas.ch/delos_website/D1.1.1%20-%20Evaluation%20and%20Comparison%20of%20the%20Service%20Archite...) - [Similar pages](#)

[PDF] [Survey of Research towards Robust Peer-to-Peer Networks: Search ...](#)

File Format: PDF/Adobe Acrobat

**insert** message similarly steps towards the target **node**, ... **Distributed Hash Table**."  
 Second International Workshop on. **Peer-to-Peer** Systems (IPTPS 03), ...  
[www.cs.umd.edu/projects/p2prg/p2p-overview.pdf](http://www.cs.umd.edu/projects/p2prg/p2p-overview.pdf) - [Similar pages](#)

[PDF] [A Self-Service Approach to Scalable Service Deployment](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

in a tree to locate and **retrieve** shared **objects** and perform operations atomically. Another example in. this **space** [24] presents a **distributed hash table** ...  
[reports-archive.adm.cs.cmu.edu/anon/2006/CMU-CS-06-101.pdf](http://reports-archive.adm.cs.cmu.edu/anon/2006/CMU-CS-06-101.pdf) - [Similar pages](#)

[PEER-TO-PEER RESEARCH GROUP J.Risson T.Moors Internet Draft ...](#)

The **insert** message similarly steps towards the target **node**, ... Tolerant **Distributed Hash Table**, Second Int'l Workshop on **Peer-to-Peer** Systems (IPTPS 03), ...  
[www.ietf.org/internet-drafts/draft-irtf-p2prg-survey-search-00.txt](http://www.ietf.org/internet-drafts/draft-irtf-p2prg-survey-search-00.txt) - 215k -  
 Cached - [Similar pages](#)

[SIPPING WG D. Bryan Internet-Draft B. Lowekamp Expires: September ...](#)

**Peer-to-Peer** (P2P) computing has emerged as a mechanism for completely ... **Nodes** are organized using a **Distributed Hash Table** (DHT) P2P structure based on ...  
[www.ietf.org/internet-drafts/draft-bryan-sipping-p2p-02.txt](http://www.ietf.org/internet-drafts/draft-bryan-sipping-p2p-02.txt) - 127k - [Cached](#) - [Similar pages](#)

[PDF] [A distributed, value-oriented XML Store](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

only logarithmic **space** for routing information at each **node**. ... tual servers, thereby hosting multiple **logical** peers per physical **peer** [2]. PAST ...  
[www.it-c.dk/people/fenne/xmlstore/XMLStore.pdf](http://www.it-c.dk/people/fenne/xmlstore/XMLStore.pdf) - [Similar pages](#)

[PDF] [Value-oriented XML Store](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

basically a **distributed hash table** allowing key (value reference) to data (locator) ... The method **insert** inserts a word element **node** into the dictionary. ...  
[www.it-c.dk/~kasperp/xmlstore/pdf/thesis.pdf](http://www.it-c.dk/~kasperp/xmlstore/pdf/thesis.pdf) - [Similar pages](#)

[PDF] [Pastwatch: a Distributed Version Control System](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

These techniques use **logical** clocks on each. replica to impose a partial order on shared **object** modi-. fications. The systems tag the shared **objects** with ...  
[project-iris.net/irisbib/papers/pastwatch:nsdi06/paper.pdf](http://project-iris.net/irisbib/papers/pastwatch:nsdi06/paper.pdf) - [Similar pages](#)

[PDF] [A Prototype for Certificate Based Authentication in Peer-to-Peer ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**Logical** identifier: every **node** has a unique ID which is an integer. number. ... Bidding for storage **space** in a **peer-to-peer** data preservation system ...  
[web.it.kth.se/~rassul/exjobb/rapporter/hamidr.pdf](http://web.it.kth.se/~rassul/exjobb/rapporter/hamidr.pdf) - [Similar pages](#)

[PDF] Survey of Research towards Robust Peer-to-Peer Networks: Search ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

**peer**. The **insert** message similarly steps towards the target **node**, ... and Efficient Data Management for a **Distributed Hash Table**, Master's Thesis, May 2003. ...  
[www.ee.unsw.edu.au/~timm/pubs/06compnet/submitted.pdf](http://www.ee.unsw.edu.au/~timm/pubs/06compnet/submitted.pdf) - [Similar pages](#)

[PDF] Efficient Peer-to-Peer Keyword SearchingFile Format: PDF/Adobe Acrobat - [View as HTML](#)

Using this approach, a **node** participates. in a **peer-to-peer** system as several **logical** hosts, propor- tional to its request processing capacity. A **node** that ...  
[www.cs.utexas.edu/~browne/CS395Tf2002/Papers/Keywordsearch.pdf](http://www.cs.utexas.edu/~browne/CS395Tf2002/Papers/Keywordsearch.pdf) - [Similar pages](#)

[PDF] A FAULT-TOLERANT HOME-BASED NAMING SERVICE FOR MOBILE AGENTSFile Format: PDF/Adobe Acrobat - [View as HTML](#)

model, a **space** is used to store and **retrieve** messages, called tuples; however, ... to other **nodes**. Furthermore, Chord is able to **insert** new Home Bases or ...  
[wcl.cs.rpi.edu/theses/fhns/cam\\_thesis\\_final.pdf](http://wcl.cs.rpi.edu/theses/fhns/cam_thesis_final.pdf) - [Similar pages](#)

[PDF] Mercury: Supporting Scalable Multi-Attribute Range Queries

File Format: PDF/Adobe Acrobat

A large number of **distributed hash table** designs [11,22,23, ... This partition is only **logical**, ie, a physical **node** can. be part of multiple **logical** hubs. ...  
[portal.acm.org/affiliated/ft\\_gateway.cfm?id=1015507&type=pdf&coll=ACM&dl=ACM&CFID=1515151...](http://portal.acm.org/affiliated/ft_gateway.cfm?id=1015507&type=pdf&coll=ACM&dl=ACM&CFID=1515151...) - [Similar pages](#)

[PDF] Scalability and Accuracy in a Large-Scale Network Emulator\* Amin ...

File Format: PDF/Adobe Acrobat

Chord [20], a filfly **distributed hash table**. A CFS. prototype was evaluated on 12 **nodes** spread across ... accurately multiplex multiple **logical nodes** onto a ...  
[portal.acm.org/affiliated/ft\\_gateway.cfm?id=844154&type=pdf&coll=ACM&dl=guide&CFID=151515...](http://portal.acm.org/affiliated/ft_gateway.cfm?id=844154&type=pdf&coll=ACM&dl=guide&CFID=151515...) - [Similar pages](#)

[PDF] Linux Peer-to-Peer File Sharing System Technical Report No. CS04-10-00File Format: PDF/Adobe Acrobat - [View as HTML](#)

This network will be designed based on three **object**, **peer**,. storage, and group. ... provides a **distributed hash table** using Chord for block storage. ...  
[pubs.cs.uct.ac.za/archive/00000174/01/Technical\\_report.pdf](http://pubs.cs.uct.ac.za/archive/00000174/01/Technical_report.pdf) - [Similar pages](#)

[PDF] Using Locality of Reference to Improve Performance of Peer-to-Peer ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

In order to **retrieve** a file, a user first obtains or calculates. its binary file key. ... 5: **Insert** the **nodes** found as solution of step 4 in the ...  
[www.dcc.ufmg.br/~virgilio/download/wosp.pdf](http://www.dcc.ufmg.br/~virgilio/download/wosp.pdf) - [Similar pages](#)

[PDF] Querying the Internet with PIERFile Format: PDF/Adobe Acrobat - [View as HTML](#)

ing **nodes**. PIER is built on top of a **Distributed Hash Table** ... on a **logical**. -dimensional Cartesian coordinate **space**, which ...  
[www.vldb.org/conf/2003/papers/S11P01.pdf](http://www.vldb.org/conf/2003/papers/S11P01.pdf) - [Similar pages](#)

[PDF] Scalability and Accuracy in a Large-Scale Network EmulatorFile Format: PDF/Adobe Acrobat - [View as HTML](#)

it processes hardware interrupts to **retrieve** packets. from the network interface. ... accurately multiplex multiple **logical nodes** onto a ...  
[www.cs.duke.edu/~vahdat/ps/modelnet.pdf](http://www.cs.duke.edu/~vahdat/ps/modelnet.pdf) - [Similar pages](#)

[PDF] TODS: cluster object storage platform designed for scalable ...

File Format: PDF/Adobe Acrobat

**logical object** ID or "path" and thus needs to look up the. real location of **objects** before ...  
**nodes**. All test programs connect to local **Peer** Servers and ...  
 ieexplore.ieee.org/iel5/8379/26368/01173549.pdf?isnumber=26368&arnumber=1173549 -  
[Similar pages](#)

[PDF] [Distributed algorithms for balanced zone partitioning in content ...](#)

File Format: PDF/Adobe Acrobat

this coordinate **space** is completely **logical**, and bears. no relation to any physical  
 coordinate ... **peer** C). Consider an **object** held by a **node** in the system. ...  
 ieexplore.ieee.org/iel5/9197/29171/01316117.pdf?arnumber=1316117 - [Similar pages](#)  
 [ More results from ieexplore.ieee.org ]

[PDF] [Distributed Pattern Matching for P2P Systems](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

(mostly **Distributed Hash Table** (DHT)-based), on the other hand, ... networked **nodes** [6].  
 However, this **space**-efficiency comes at ...  
 bcr2.uwaterloo.ca/~rboutaba/Papers/Conferences/noms2006.pdf - [Similar pages](#)

[PDF] [Proceedings of the First Symposium on Networked Systems Design and ...](#)

File Format: PDF/Adobe Acrobat

with the **object**. Content providers **insert** an **object's** meta- ... about **nodes** nearby in ID  
**space**. To drive our simulations, we used two days of NLNR ...  
 db.usenix.org/events/nsdi04/tech/full\_papers/walfish/walfish.pdf - [Similar pages](#)

[PDF] [Information Sources and Sinks in a Grid Environment CoreGRID ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

one of the current state of the art **distributed hash table** algorithms in order ... set to zero,  
 it will **retrieve** the metric only once. **Objects** can install a ...  
 www.coregrid.net/mambo/images/stories/TechnicalReports/tr-0022.pdf - [Similar pages](#)

[PDF] [Indexing Heterogeneous Data](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

An exception is [11], which uses a **distributed hash table** (DHT) to ... **Space**.Complexity:  
 Each **node** stores at least. n. c. fewer **objects** than its parent. ...  
 www.cs.washington.edu/homes/suciu/tech-report.pdf - [Similar pages](#)

[PDF] [Lecture-2 Content Sharing in P2P](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Pools unused disk **space** in **peer** computers to ... Calculates file key, sends an **insert**  
 message to. **node** with the key and a ... **node** J::**retrieve**(K) ...  
 www.iipf.fudan.edu.cn/~zhousg/courses/adc-2006s/Lecture-2%20Content%20Sharing%  
 20in%20P2P.pdf - [Similar pages](#)

[PDF] [DIPSEA: A MODULAR DISTRIBUTED HASH TABLE](#)

File Format: PDF/Adobe Acrobat

**insert**, **retrieve** or update an **object**, we first compute the hash-value of its ... In a **peer-to**-  
**peer** system, it is difficult for all **nodes** to agree on the ...  
 www-db.stanford.edu/~manku/papers/phd-thesis.pdf - [Similar pages](#)

[PDF] [A distributed, value-oriented XML Store](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

and each **peer** contributes resources, such as storage **space** and CPU cycles, to the ... at a  
**node**, and to **retrieve** a value given a key, respectively. ...  
 www.itu.dk/xmlstore/XMLStore.pdf - [Similar pages](#)

[PDF] [i Chord and Symphony: An Examination of Distributed Hash Tables ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

As for the term "overlay networks", these are the **logical** networks that have **nodes**. within an explicit topological **space**, and sustain links with other **nodes** ...  
[planet.urv.es/planetsim/HaladynaBraunischMALMThesis20060430.pdf](http://planet.urv.es/planetsim/HaladynaBraunischMALMThesis20060430.pdf) - [Similar pages](#)

[PDF] [PEPITO](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

as a **Distributed Hash Table** (DHT) abstraction. A **node** (**Peer**) in such systems, ... DHTs assume that for each item, there is a unique key and to **retrieve** the ...  
[bigpc.net.pku.edu.cn:8080/paper/new/survey/PEer-to-Peer%20Implementation%20and%20TheOry.pdf](http://bigpc.net.pku.edu.cn:8080/paper/new/survey/PEer-to-Peer%20Implementation%20and%20TheOry.pdf) - [Similar pages](#)

[PDF] [Tapestry: A Resilient Global-scale Overlay for Service Deployment](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Tapestry provides efficient and scalable routing. of messages directly to **nodes** and **objects** in a large, sparse address **space**. We presented the architecture ...  
[bigpc.net.pku.edu.cn:8080/paper/new/by%20conference/Others/Tapestry%20A%20resilient%20global-scale%20over...](http://bigpc.net.pku.edu.cn:8080/paper/new/by%20conference/Others/Tapestry%20A%20resilient%20global-scale%20over...) - [Similar pages](#)

[PDF] [Churn resistance in a DHT storing mutable and immutable data](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Each Pastry **node** maintains a list of its **logical** neigh- ... tributed **object** location and routing on large-scale. **peer-to-peer** systems. In Proc. ...  
[www-src.lip6.fr/homepages/Fabio.Picconi/churn.pdf](http://www-src.lip6.fr/homepages/Fabio.Picconi/churn.pdf) - [Similar pages](#)

[A P2P Approach to SIP Registration and Resource Location](#)

3.1 **Peer-to-Peer** Fundamentals 3.2 **Distributed Hash Table** (DHT) Systems 3.3 Chord 3.4 Issues for P2P Systems 4. Overview 4.1 **Node** Functions and Behavior ...  
[www.p2psip.org/drafts/draft-bryan-sipping-p2p-02.html](http://www.p2psip.org/drafts/draft-bryan-sipping-p2p-02.html) - 145k - [Cached](#) - [Similar pages](#)

[PDF] [Kelips: Building an Efficient and Stable P2P DHT through Increased ...](#)

File Format: PDF/Adobe Acrobat

A **peer-to-peer** (p2p) **distributed hash table** (DHT) system. allows hosts to join and fail silently (or leave), as well as to **insert** and. **retrieve** files ...  
[www.springerlink.com/index/77PGU33GQ6PVYLVW.pdf](http://www.springerlink.com/index/77PGU33GQ6PVYLVW.pdf) - [Similar pages](#)

[PDF] [Towards a Common API for Structured Peer-to-Peer Overlays](#)

File Format: PDF/Adobe Acrobat

Participating **nodes** are as-. signed uniform random nodeids from a large identifier **space**. Application-specific. **objects** are assigned unique identifiers ...  
[www.springerlink.com/index/R9P1GMYEK16KFKLQ.pdf](http://www.springerlink.com/index/R9P1GMYEK16KFKLQ.pdf) - [Similar pages](#)  
[\[ More results from www.springerlink.com \]](#)

[PDF] [distCVS: A Distributed Peer-to-Peer Versioning File Storage System](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

decentralized **object** location, and routing for large-scale. **peer-to-peer** systems. Lecture Notes in Computer Science,. 2218:329--350, 2001. [7] A. Sotira. ...  
[cs.bc.edu/bach/2005/05AndrewLogan.pdf](http://cs.bc.edu/bach/2005/05AndrewLogan.pdf) - [Similar pages](#)

[PDF] [Architectures and Algorithms for Internet-Scale \(P2P\) Data ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Indirection in **space**. - **Logical** (content-based) IDs, routing to those IDs ... Operation: take key as input; route messages to **node** holding key. **retrieve** (K ...  
[www.cs.toronto.edu/vldb04/protected/Tutorial4-ho.pdf](http://www.cs.toronto.edu/vldb04/protected/Tutorial4-ho.pdf) - [Similar pages](#)

[SIPPING WG D. Bryan Internet-Draft B. Lowekamp Expires: September ...](#)

**Nodes** are organized using a **Distributed Hash Table** (DHT) structure. ... from the network also will allow a user to **retrieve** their profile from any computer. ...  
[www.cs.wm.edu/~lowekamp/papers/draft-bryan-sipping-p2p-02.txt](http://www.cs.wm.edu/~lowekamp/papers/draft-bryan-sipping-p2p-02.txt) - 127k -

[Cached](#) - [Similar pages](#)

[PDF] [D3.2.1 - Detailed Design Specification of Core Bricks](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

With respect to the BRICKS P2P networking, we will use terms **peer**, **node** and ... In order to easily **retrieve** an **object**, a key is assigned to it. ...

[www.brickcommunity.org/discussion\\_area/reports/D321-CoreBRICKS.pdf/download](http://www.brickcommunity.org/discussion_area/reports/D321-CoreBRICKS.pdf/download) -

[Similar pages](#)

[DOC] [Model Cover Page for Deliverables](#)

File Format: Microsoft Word - [View as HTML](#)

This coordinate **space** is completely **logical** and bears no relation to any ... To **retrieve** an entry corresponding to key K, any **node** can apply the same ...

[edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2\\_0.doc](http://edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.doc) - [Similar pages](#)

[PDF] [Kelips : Building an Efficient and Stable P2P DHT Through ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

A **peer-to-peer** (p2p) **distributed hash table** (DHT). system allows hosts to join and fail silently (or. leave), as well as to **insert** and **retrieve** files (ob- ...

[iptps03.cs.berkeley.edu/final-papers/kelips.pdf](http://iptps03.cs.berkeley.edu/final-papers/kelips.pdf) - [Similar pages](#)

[PDF] [Fusing Relational Databases and P2P: A Resource Sensitive DHT Overlay](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

Many content-based routing (**Distributed Hash Table** (DHT)) schemes have been ... 4.3

**Peer Node** Topologies used (see Figure 4.2 for **node** descriptors) . . . .

[www.inf.ed.ac.uk/publications/thesis/online/IM050248.pdf](http://www.inf.ed.ac.uk/publications/thesis/online/IM050248.pdf) - [Similar pages](#)

[PDF] [Proceedings of the SIGIR Workshop on Peer-to-Peer Information ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

as a **space** of **objects** with a specific topology (eg a similarity measure or ... documents each leaf **node** is likely to **retrieve**. This is analogous ...

[p2pir.is.informatik.uni-duisburg.de/2004/proceedings.pdf](http://p2pir.is.informatik.uni-duisburg.de/2004/proceedings.pdf) - [Similar pages](#)

[PDF] [GPU, Framework Extensions for the Distributed Search Engine and ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

These functions were taken from the program. Deep **Space** Nine [10]. In order to use colormaps one should first define a TColorMap **object**. At the ...

[www.tea.ch/gpu/updates/gpu\\_ext.pdf](http://www.tea.ch/gpu/updates/gpu_ext.pdf) - [Similar pages](#)

[PDF] [nstitute for ofware esearch](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

A structured network uses a **distributed hash table** (DHT) approach to ... Decentralized **Object** Location and Routing for Large-scale **Peer-to-Peer** Systems. ...

[www.isr.uci.edu/tech\\_reports/UCI-ISR-04-6.pdf](http://www.isr.uci.edu/tech_reports/UCI-ISR-04-6.pdf) - [Similar pages](#)

[PDF] [PEER-TO-PEER COMMUNITIES: ARCHITECTURE, INFORMATION AND TRUST ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

When **node** X is born, it needs to have one or more **logical** neighbors. ... Unlike overlay networks used by **Distributed Hash Table** (DHT) based **peer-to-peer** ...

[www.khambatti.com/mujtaba/ArticlesAndPapers/MujtabaDissertationFINAL.pdf](http://www.khambatti.com/mujtaba/ArticlesAndPapers/MujtabaDissertationFINAL.pdf) -

[Similar pages](#)

[PDF] [INSTITUT FUR INFORMATIK Managing Trust in a Distributed Network](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The table will **retrieve** a key of a **node** as input and provide the key of a **node** managing ... Kademia is another **peer-to-peer distributed hash table** (DHT), ...

[www.mnm-team.org/pub/Diplomarbeiten/else06/PDF-Version/else06.pdf](http://www.mnm-team.org/pub/Diplomarbeiten/else06/PDF-Version/else06.pdf) - [Similar pages](#)

**[PDF] A Peer-to-Peer Filing System for Web Services**File Format: PDF/Adobe Acrobat - [View as HTML](#)

creates a d-dimensional **space** in which each **node** is assigned ownership of a ... mechanism, with an interface to **insert** and **retrieve** files from the network. ... [www.cs.bath.ac.uk/~amb/CM30076/projects.bho/2003-4/GarethWesternDissertation.pdf](http://www.cs.bath.ac.uk/~amb/CM30076/projects.bho/2003-4/GarethWesternDissertation.pdf) - [Similar pages](#)

**[PDF] Distributed Evaluation of Continuous Equi-join Queries over Large ...**File Format: PDF/Adobe Acrobat - [View as HTML](#)

one server **nodes**. Clients can **insert** files and pose queries. When a server has no more storage **space** sends data to other servers (split operation) and in ... [www.intelligence.tuc.gr/~sidraios/Stratos%20Idreos%20-%20Master%20thesis.pdf](http://www.intelligence.tuc.gr/~sidraios/Stratos%20Idreos%20-%20Master%20thesis.pdf) - [Similar pages](#)

**[PDF] Bulletin of the Technical Committee on March 2005 Vol. 28 No. 1 ...**File Format: PDF/Adobe Acrobat - [View as HTML](#)

network and provides facilities for locating the current **peer node** responsible ... In particular, small steps in the **logical** address. **space** usually resulted ... [sites.computer.org/debull/A05MAR-CD.pdf](http://sites.computer.org/debull/A05MAR-CD.pdf) - [Similar pages](#)

**[PDF] Censorship-Resistant Communication over Public Networks**File Format: PDF/Adobe Acrobat - [View as HTML](#)

Chord [246] is a **distributed hash table** in which the key **space** can be imagined ... to store and **retrieve** records, and to initialise and maintain each **node's** ... [www.cs.ucl.ac.uk/staff/M.Rogers/transfer-report.pdf](http://www.cs.ucl.ac.uk/staff/M.Rogers/transfer-report.pdf) - [Similar pages](#)

**[PDF] How to Exploit Ontologies in Trust Negotiation**File Format: PDF/Adobe Acrobat - [View as HTML](#)

Each **peer's** IP address is mapped into a **logical** hash **space**. Through random as- ... We use the ATMS **nodes** to represent two types of **objects**. We ... [www.l3s.de/~olmedilla/pub/2004/2004\\_TSRSW04\\_proceedings.pdf](http://www.l3s.de/~olmedilla/pub/2004/2004_TSRSW04_proceedings.pdf) - [Similar pages](#)

**[PDF] Digital Library Architectures:**

File Format: PDF/Adobe Acrobat

table (DHT) to partition the term **space**, such that every **peer** is responsible for ... work of **nodes** that can **insert**, store, and **retrieve objects** using ... [ii.umit.at/research/delos\\_website/ISBN-88-87331-60-X\\_delos-proceedings.pdf](http://ii.umit.at/research/delos_website/ISBN-88-87331-60-X_delos-proceedings.pdf) - [Similar pages](#)

**[PDF] DDLs: Extending Open Hypermedia Systems into Peer-to-Peer Environments**

File Format: PDF/Adobe Acrobat

The servers, upon the receipt of requests, **retrieve** documents and send ... bution of keys in a uniform **space** in which **node** and **object** identifiers share the ... [eprints.ecs.soton.ac.uk/10917/01/TestThesis\\_submit.pdf](http://eprints.ecs.soton.ac.uk/10917/01/TestThesis_submit.pdf) - [Similar pages](#)

**[PDF] Towards a Common API for Structured Peer-to-Peer Overlays**File Format: PDF/Adobe Acrobat - [View as HTML](#)

and **retrieve** functionality, where the value is always stored. at the live overlay **node(s)** to which the key is mapped by. the KBR layer. Values can be **objects** ... [www.cs.ucsb.edu/~ravenben/classes/papers/apis.pdf](http://www.cs.ucsb.edu/~ravenben/classes/papers/apis.pdf) - [Similar pages](#)

**[PDF] Induced Churn as Shelter from Routing-Table Poisoning**File Format: PDF/Adobe Acrobat - [View as HTML](#)


idea is to run an unpredictable **logical** clock per **peer**. At ev- ery timestep, each **peer** ... the ID **space**. The returned responsible **node** B is added to ... [db.cs.berkeley.edu/papers/ndss05-maelstrom.pdf](http://db.cs.berkeley.edu/papers/ndss05-maelstrom.pdf) - [Similar pages](#)

Did you mean to search for: insert **retrieve** object node logical space peer "distributed hash table"

Try your search again on [Google Book Search](#)

Google ►  
Result Page:    1   2   3    **Next**

See all your photos right in your Sidebar.  
Free! [Download Google Desktop](#).

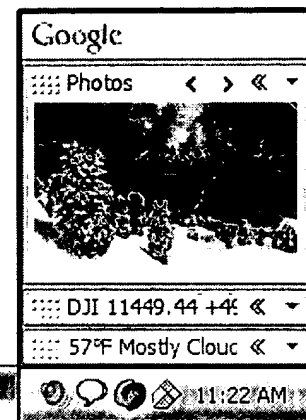


insert retriev object node logical spa

[Search within results](#) | [Language Tools](#) | [Search Tips](#) | [Dissatisfied? Help us improve](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2006 Google

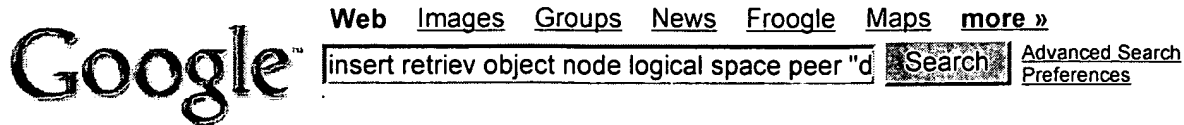[Sign in](#)

**Web** Results 101 - 200 of about 425 for insert retriev object node logical space peer "distributed hash tabl

[PDF] Keyword Fusion to Support Efficient Keyword-based Search in Peer ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

contains the next **node** information in the **logical** ring and ... **object** address and routing for large-scale **peer-to-peer** systems," in ...

www.public.asu.edu/~kryu1/papers/KF-GP2PC-CR2.pdf - [Similar pages](#)

[PDF] LNCS 3298 - GridVine: Building Internet-Scale Semantic Overlay ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

structure based on a **distributed hash table** (DHT). GridVine uses two of P- ... By issuing a query from the **peer** using C. 0. ,. we could **retrieve** all the 15 ...

lsirpeople.epfl.ch/aberer/PAPERS/ISWC2004.pdf - [Similar pages](#)

[PDF] Similarity Queries on Structured Data in Structured Overlays

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**peer** is responsible for a given region of this **space** and stor- ...  $T = \text{Retrieve}(\text{key}(\text{oid}), p);$ .

11.: build complete **object** o from T ; 12.: for all  $t \in T$  do ...

lsirpeople.epfl.ch/hauswirth/papers/NetDB06.pdf - [Similar pages](#)

[ More results from lsirpeople.epfl.ch ]

[PDF] Grid Service Monitor

File Format: PDF/Adobe Acrobat - [View as HTML](#)

query message did not reach the **peer node** that holds the datasets. ... **retrieve** the required data from its local monitoring information database, ...

www.inf.ed.ac.uk/publications/thesis/online/IT050246.pdf - [Similar pages](#)

[PDF] Coordinating Access to Computation and Data in Distributed Systems ...

File Format: PDF/Adobe Acrobat - [View as HTML](#)

under a unified name **space** with a URL like syntax. A Chirp **object** in ROOT allows ... The cooperative cache is built using a **distributed hash table** [64, 89]. ...

www.cs.wisc.edu/condor/doc/thain-dissertation.pdf - [Similar pages](#)

[PDF] Third International Workshop on Distributed Event-Based Systems

File Format: PDF/Adobe Acrobat

ized **Object** Location and Routing for Large-Scale **Peer-to- Peer** Systems. ... cess of matching the ID **space** of the event with **nodes'** ID. ...

www-serl.cs.colorado.edu/~carzanig/debs04/debs04proceedings.pdf - [Similar pages](#)

[PDF] Untangling the Web from DNS

File Format: PDF/Adobe Acrobat - [View as HTML](#)

To **retrieve objects** using this kind of URL, the Web ... about **nodes** nearby in ID **space**. To drive our simulations, we used two days of NLNR ...

nms.csail.mit.edu/papers/sfr-nsdi04.pdf - [Similar pages](#)

[PDF] A Session-Based Architecture for Internet Mobility Mark Alexander ...

File Format: PDF/Adobe Acrobat

Naming systems use widely varied methods to store and **retrieve** name bindings. ... session between itself and an application running on the mobile **node**. ...

nms.csail.mit.edu/~snoeren/papers/thesis/thesis.pdf - [Similar pages](#)



[PDF] Proceedings of VLDB 2005 PhD WorkshopFile Format: PDF/Adobe Acrobat - [View as HTML](#)is still required to reliably **retrieve** an **object**. Hyper-. CuP is the architecture underlying the ... **peer** lookup service for internet applications. In SIG- ...[www.ccs.neu.edu/research/vldb2005workshop/Proceedings-PhDWorkshop.pdf](http://www.ccs.neu.edu/research/vldb2005workshop/Proceedings-PhDWorkshop.pdf) -[Similar pages](#)[PDF] Future Digital Library Management Systems: System Architecture and ...

File Format: PDF/Adobe Acrobat

XPeer is a **logical super-peer** architecture which is well suited for ... **space** wrt which the **objects** of the clusters affected by user interaction are the ...[dbis.cs.unibas.ch/delos\\_website/D1.1.2%20-%20Workshop%20II%20on%20DL%](http://dbis.cs.unibas.ch/delos_website/D1.1.2%20-%20Workshop%20II%20on%20DL%20Access%20and%20Architecture%20join...)[20Access%20and%20Architecture%20join...](#) - [Similar pages](#)[PPT] Architectures and Algorithms for Internet-Scale (P2P) Data ManagementFile Format: Microsoft Powerpoint - [View as HTML](#)Indirection in **space**. **Logical** (content-based) IDs, routing to those IDs ... **insert**(K1,V1).Operation: take key as input; route messages to **node** holding key ...[db.cs.berkeley.edu/jmh/talks/vldb04-p2ptut-final.ppt](http://db.cs.berkeley.edu/jmh/talks/vldb04-p2ptut-final.ppt) - [Similar pages](#)[PDF] MMAPPs

File Format: PDF/Adobe Acrobat

Request frequency, ie, number of tasks per online **peer node**, **object**, ... separated into bins of varying size to implement a **distributed hash table**. Other ...[www.mmapps.info/results/WP2-D5.1-P2P-Overlay-1.0.pdf](http://www.mmapps.info/results/WP2-D5.1-P2P-Overlay-1.0.pdf) - [Similar pages](#)[PDF] Tapestry: A Resilient Global-Scale Overlay for Service DeploymentFile Format: PDF/Adobe Acrobat - [View as HTML](#)Abstract—We present Tapestry, a **peer-to-peer** overlay routing ... directly to **nodes** and **objects** in a large, sparse address **space**. ...[oceanstore.cs.berkeley.edu/publications/papers/pdf/tapestry\\_jsac.pdf](http://oceanstore.cs.berkeley.edu/publications/papers/pdf/tapestry_jsac.pdf) - [Similar pages](#)[PDF] Decentralized Object Location and Routing: A New Networking ...

File Format: PDF/Adobe Acrobat

OceanStore **node** should be able to locate and **retrieve** a file replica if such a ... from a large identifier **space**. Application-specific **objects** are assigned ...[oceanstore.cs.berkeley.edu/publications/papers/pdf/zhao.pdf](http://oceanstore.cs.berkeley.edu/publications/papers/pdf/zhao.pdf) - [Similar pages](#)[PDF] Tapestry: A Resilient Global-scale Overlay for Service DeploymentFile Format: PDF/Adobe Acrobat - [View as HTML](#)storage **space** in the network for faster routing. We investigate this tradeoff by publishing additional. **object** pointers to k backup **nodes** of the next hop of ...[bnrg.cs.berkeley.edu/~adj/publications/paper-files/tapestry\\_jsac.pdf](http://bnrg.cs.berkeley.edu/~adj/publications/paper-files/tapestry_jsac.pdf) - [Similar pages](#)[PDF] AN OBJECT-BASED SOFTWARE DISTRIBUTION NETWORK

File Format: PDF/Adobe Acrobat

**node** into one or more directory subnodes. Each subnode is made responsible for. a specific part of the **object**-identifier **space** via a special hashing ...[www.cs.vu.nl/res/theses/bakker\\_thesis.pdf](http://www.cs.vu.nl/res/theses/bakker_thesis.pdf) - [Similar pages](#)[PDF] An Approach to A Scalable Wide-Area Web Service

File Format: PDF/Adobe Acrobat

gateway) must bind to a GlobeDoc **object** in order to **retrieve** GlobeDoc content. Be- ... use of **peer-to-peer** networks and related **distributed hash table** ...[www.cs.vu.nl/~ikuz/phd/thesis.pdf](http://www.cs.vu.nl/~ikuz/phd/thesis.pdf) - [Similar pages](#)[PDF] D3.1.2 - Infrastructure Requirements and Overall System Design

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The P2P layer offers functionalities of a DHT (**Distributed Hash Table**) to the upper ...  
offers a set of interface classes to **retrieve** (metadata of) **objects** ...  
[www.brickscmmunity.org/discussion\\_area/reports/D312-OverallSystemDesign.pdf/download](http://www.brickscmmunity.org/discussion_area/reports/D312-OverallSystemDesign.pdf/download) - [Similar pages](#)

[PDF] [Peer to Peer and SPAM in the Internet](#)

File Format: PDF/Adobe Acrobat

**space** those files take up. So, in connecting, the new **node** ... network can **retrieve objects** directly from each other. Therefore, P2P takes advantage of the ...  
[www.netlab.tkk.fi/opetus/s38030/F03/Report-p2p-spam-2003.pdf](http://www.netlab.tkk.fi/opetus/s38030/F03/Report-p2p-spam-2003.pdf) - [Similar pages](#)

[PDF] [DataGrid](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

**logical** resource. Subsequent write to this data **object** will write to all data ... To **retrieve** an entry corresponding to key K, any **node** can apply the same ...  
[edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2\\_0.pdf](http://edg-wp2.web.cern.ch/edg-wp2/docs/DataGrid-02-D2.1-0105-2_0.pdf) - [Similar pages](#)

[PDF] [Boris Koldehofe DI FCUL TR 06 10 June 2006 Departamento de ...](#)

File Format: PDF/Adobe Acrobat

**logical space**. DHT **nodes** typically rely upon "long-range ... tralized **object** location, and routing for large-scale **peer-to- peer** systems. ...  
[www.di.fc.ul.pt/tech-reports/06-10.pdf](http://www.di.fc.ul.pt/tech-reports/06-10.pdf) - [Similar pages](#)

[PDF] [Master's Thesis Search Load Distribution Mechanism for Active P2P ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

exchanged among peers are relayed on **logical** P2P networks, a **peer** behaves as a **node**. For a **peer** to obtain an **object**, it must first find a **peer** that can ...  
[www.anarg.jp/achievements/web2003/Paper/shi03mastersthesis-SearchLoadDistribution.pdf](http://www.anarg.jp/achievements/web2003/Paper/shi03mastersthesis-SearchLoadDistribution.pdf) - [Similar pages](#)

[PDF] [Papers accepted for CGW'04](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

VSS offers standard operations, which let user to store and **retrieve** datafile ... repository is based on the **distributed hash table** (DHT) approach emerging ...  
[www.cyf-kr.edu.pl/cgw04/contr-papers.pdf](http://www.cyf-kr.edu.pl/cgw04/contr-papers.pdf) - [Similar pages](#)

[PDF] [Chord: a scalable peer-to-peer lookup protocol for internet ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

load on the **logical** root by partitioning **objects** among multiple ... periodically remap the identifier **space** onto **nodes**. Chord also ...  
[www.cs.rutgers.edu/~tdnguyen/courses/is-fall-2005/ton-2003-stoica-chord.pdf](http://www.cs.rutgers.edu/~tdnguyen/courses/is-fall-2005/ton-2003-stoica-chord.pdf) - [Similar pages](#)

[Browse CITRIS Projects](#)

The objective is not just to **retrieve** the most relevant document or text passage ... These proposals support a **Distributed Hash Table** (DHT) functionality in ...  
[www.citris-uc.org/book/print/1202-348k](http://www.citris-uc.org/book/print/1202-348k) - [Cached](#) - [Similar pages](#)

[PDF] [PEPITO](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

to design a read/write **peer-to-peer** file system that provides security and access control on top of a **distributed hash table**. 1.1 Overview ...  
[www.sics.se/pepito/D2.3/D2-3.pdf](http://www.sics.se/pepito/D2.3/D2-3.pdf) - [Similar pages](#)

[A Framework For The Understanding, Optimization and Design Of ...](#)

File Format: Unrecognized - [View as HTML](#)

A **node (Peer)** in such systems, acquires an identifier based on a cryptographic ... uniquely

identified by identifiers taken from the same **logical space**. ...  
[www.sics.se/~sameh/download.php?target=pubs/2003/lic/lic.pdf](http://www.sics.se/~sameh/download.php?target=pubs/2003/lic/lic.pdf) - [Similar pages](#)  
[\[ More results from www.sics.se \]](#)

[PDF] [XXV Auto-ID](#)

File Format: PDF/Adobe Acrobat  
 information **space**. Here the information **object**. can be either a **logical object** which is a collection ... tion **node(s)**. In other words, IP address **space** is ...  
[www.wide.ad.jp/project/document/reports/pdf2003/part25.pdf](http://www.wide.ad.jp/project/document/reports/pdf2003/part25.pdf) - [Similar pages](#)

[PDF] [Data Sharing and Information Retrieval in Wide-Area Distributed ...](#)

File Format: PDF/Adobe Acrobat  
**nodes**, when varying the number of **objects** to **retrieve** for each ... **Distributed Hash Table** (DHT) to map a term to a **node** where the inverted list ...  
[www.cs.rochester.edu/u/www/u/sarrmor/publications/tang-thesis.pdf](http://www.cs.rochester.edu/u/www/u/sarrmor/publications/tang-thesis.pdf) - [Similar pages](#)

[PDF] [Project no.: IST-507102 Project full title: My personal Adaptive ...](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 contains the JXTA **Peer-Id** of all the Master **Nodes** / SMM that are ... (S-CSCF) performs the session control services for the UA and is able to **retrieve** a ...  
[www.ist-magnet.org/GetAsset.action?contentId=942902&assetId=943008](http://www.ist-magnet.org/GetAsset.action?contentId=942902&assetId=943008) - [Similar pages](#)

[PDF] [Maelstrom: Churn as Shelter](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)  
**space**, would be admissible instead. As long as a **node** can ... idea is to run an unpredictable **logical** clock per **peer**. At ev- ery time-step, each **peer** ...  
[www.eecs.berkeley.edu/Pubs/TechRpts/2005/EECS-2005-11.pdf](http://www.eecs.berkeley.edu/Pubs/TechRpts/2005/EECS-2005-11.pdf) - [Similar pages](#)

[PDF] [QUERY PROCESSING WITH GUARANTEES IN QUERY-CENTRIC NETWORKS](#)

File Format: PDF/Adobe Acrobat  
**PEER NODE** (Alice). (b). <http://alice.youserv.com/yousearch>. CLIENT BROWSER (Bob) ...  
 A single **logical** tuple **space** is replicated at N. r. worker hosts. ...  
[www-db.stanford.edu/~bawa/dissertation/bawa-qpde-05.pdf](http://www-db.stanford.edu/~bawa/dissertation/bawa-qpde-05.pdf) - [Similar pages](#)

[PDF] [D 5.3 SMART - Final Architectural Design](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 the SMART control under the assumption that a mechanism to **retrieve** context ... that for a d-dimensional **space**, the number of **nodes** can grow without ...  
[www.ambient-networks.org/publications/D5\\_3\\_SMART\\_Final\\_Architectural\\_Design\\_PU.pdf](http://www.ambient-networks.org/publications/D5_3_SMART_Final_Architectural_Design_PU.pdf)  
 - [Similar pages](#)

[PDF] [D 8.3 Ambient Network Management - Proof of Concepts and Evaluations](#)

File Format: PDF/Adobe Acrobat  
 Organizing Ambient Control **Space** - An Ambient Network Architecture for Dynamic ... The **Peer-to-Peer** network self-organization framework organizes **nodes** and ...  
[www.ambient-networks.org/.../D8\\_3\\_Ambient\\_Network\\_Management\\_Proof\\_of\\_Concepts\\_&\\_Evaluations\\_PU.pdf](http://www.ambient-networks.org/.../D8_3_Ambient_Network_Management_Proof_of_Concepts_&_Evaluations_PU.pdf) - [Similar pages](#)  
[\[ More results from www.ambient-networks.org \]](#)

[PDF] [New Arch: Future Generation Internet Architecture 6/30/00-12/31/03](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)  
 independent and application-independent name **space** for **objects** [URI], ... of minimal dependency is that it avoids **logical** loops in restarting **nodes**. ...  
[www.isi.edu/newarch/iDOCS/final.finalreport.pdf](http://www.isi.edu/newarch/iDOCS/final.finalreport.pdf) - [Similar pages](#)

[PDF] [Tapestry: A Resilient Global-scale Overlay for Service Deployment](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)  
**distributed hash table** (DHT) or a decentralized **object**. location and routing (DOLR) layer

[3]. ... wait for 15 minutes, and **insert** new **nodes** equal to 50% ...

[www.cs.ucsb.edu/~ravenben/classes/290F/papers/tapestry-jsac04.pdf](http://www.cs.ucsb.edu/~ravenben/classes/290F/papers/tapestry-jsac04.pdf) - [Similar pages](#)

[PDF] **"Peer-To-Peer Grid Databases for Web Service Discovery". In: Grid ...**

File Format: PDF/Adobe Acrobat

directly to a subset of these **nodes** to query and **retrieve** result sets as it ... **distributed hash table** lookup. Simple queries for exact match (ie given a ...

[doi.wiley.com/10.1002/0470867167.ch19](http://doi.wiley.com/10.1002/0470867167.ch19) - [Similar pages](#)

[PDF] **Paper Summaries**

File Format: PDF/Adobe Acrobat

identifier **space**) and given number of therein contained **peer** neighbors. If ... PIER relies on a **distributed hash table** (DHT) over participating **nodes** ...

[berkeley.intel-research.net/maniatis/bibliography.pdf](http://berkeley.intel-research.net/maniatis/bibliography.pdf) - [Similar pages](#)

**ATKSI - Glossary of Terms.**

Freenet works by pooling the contributed bandwidth and storage **space** of member computers to allow users to anonymously publish or **retrieve** various kinds of ...

[www.atksi.com/glossary.htm](http://www.atksi.com/glossary.htm) - 632k - [Cached](#) - [Similar pages](#)

[PDF] **Building a Replicated Data Store using Berkeley DB and the Chord DHT**

File Format: PDF/Adobe Acrobat - [View as HTML](#)

on top of the **distributed hash table** Chord and the database application Berkeley ... a number of server **nodes** that self-organize in a **logical peer-to-peer** ...

[www.diva-portal.org/diva/getDocument?urn\\_nbn\\_no\\_ntnu\\_diva-624-1\\_\\_fulltext.pdf](http://www.diva-portal.org/diva/getDocument?urn_nbn_no_ntnu_diva-624-1__fulltext.pdf) -

[Similar pages](#)

[PDF] **Designs and Analyses in Structured Peer-to-Peer Systems**

File Format: PDF/Adobe Acrobat

tructures [6, 5], that **nodes** of a DKS(N,k,f) and **objects** managed by these. **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...

[www.diva-portal.org/diva/getDocument?urn\\_nbn\\_se\\_kth\\_diva-264-1\\_\\_fulltext.pdf](http://www.diva-portal.org/diva/getDocument?urn_nbn_se_kth_diva-264-1__fulltext.pdf) -

[Similar pages](#)

[PDF] **Microsoft PowerPoint - s2a-ac-automate.ppt**

File Format: PDF/Adobe Acrobat

provide specialized services such as **peer-to-peer** semantic messaging, ... Overall architecture is a **distributed hash table** (DHT), similar ...

[automate.rutgers.edu/tutorials/icac04-tutorial-slides/s2a-ac-automate.pdf](http://automate.rutgers.edu/tutorials/icac04-tutorial-slides/s2a-ac-automate.pdf) - [Similar pages](#)

[PDF] **MSACDAMR**

File Format: PDF/Adobe Acrobat

XML files makes it necessary to store and **retrieve** data efficiently. Unfortunately, the **logical** organi ... **peer** and the others are considered as leaf-**nodes**. ...

[www.nii.ac.jp/graduate/thesis/pdf/Jerome\\_Dr\\_thesis.pdf](http://www.nii.ac.jp/graduate/thesis/pdf/Jerome_Dr_thesis.pdf) - [Similar pages](#)

[PDF] **Dealing with Massive Data: from Parallel I/O to Grid I/O**

File Format: PDF/Adobe Acrobat

various types, that store, **retrieve** and process large quantities of data. ... **peer-to-peer** federation of **logical** name spaces (meta data catalogs) ...

[www.cs.dartmouth.edu/pario/hubovsky\\_dictionary.pdf](http://www.cs.dartmouth.edu/pario/hubovsky_dictionary.pdf) - [Similar pages](#)

[PDF] **2005 First Workshop on Secure Network Protocols (NPSec)**

File Format: PDF/Adobe Acrobat

Approximate **object**-location and Spam filtering on **peer-to-peer** systems. ... available, through which a **node** is able to **retrieve** the ...

[www.ieee-icnp.org/2005/NPsec.pdf](http://www.ieee-icnp.org/2005/NPsec.pdf) - [Similar pages](#)

[PDF] Project Number: Project Title: Simplicity Deliverable Type: PU ...

File Format: PDF/Adobe Acrobat

Necessary to store and **retrieve** user preferences and other ... A **node** can. **insert** an **object** into PAST, which will be stored in a number of copies into the ...  
 server.ist-simplicity.org/download.php?OID=164400&FILENAME=D2101-Use%20cases,%  
 20requirements%20and%20... - [Similar pages](#)

[PDF] MoSAIC: Mobile System Availability Integrity and ConfidentialityFile Format: PDF/Adobe Acrobat - [View as HTML](#)

independently of how much storage **space** each **node** consumes. Consequently, using a DHT ... **object** location and routing for large-scale **peer-to-peer** systems. ...  
 www2.laas.fr/mosaic/documents/MoSAIC-report-20060703.pdf - [Similar pages](#)

[PDF] Ανάκτηση Σημασιολογικής Πληροφορίας γιαFile Format: PDF/Adobe Acrobat - [View as HTML](#)

**distributed hash table** [80]. Atlas **nodes** store RDF(S) data in a Bamboo net- ... **Logical** foundation-. s of **object**-oriented and frame-based languages. ...  
 cgi.di.uoa.gr/~iris/miliaraki-thesis.pdf - [Similar pages](#)

[PDF] : a new overlay network based on CAN and ChordFile Format: PDF/Adobe Acrobat - [View as HTML](#)

**distributed hash table**. Each CAN **node** stores a part (called. a zone) of the hash table, ...  
 Lemma 1: In **logical** overlay, given a **peer** P and a key K, ...  
 homepage.fudan.edu.cn/~wnqian/publications/IJHPCN.pdf - [Similar pages](#)

[PDF] Carbonara - a semantically searchable distributed repositoryFile Format: PDF/Adobe Acrobat - [View as HTML](#)

In an unstructured **peer-to-peer** network, **nodes** randomly connect to other **nodes** ... of a **distributed hash table**. It can be used as an underlying ...  
 www.imit.kth.se/~rassul/exjobb/rapporter/sima-emil.pdf - [Similar pages](#)

Digital Commons: Browse by Resource Type

Abstract: A **peer-to-peer** (p2p) **distributed hash table** (DHT) system allows ... and fail silently (or leave), as well as to **insert** and **retrieve** les (**objects**). ...  
 digitalcom.thei3p.org/browse\_by\_type.html?type-id=1001 - 820k - [Cached](#) - [Similar pages](#)

FeedShow: OakLeaf Systems

I used the Data Source Configuration Wizard to generate an **Object** Data Source from the Nwind.Northwind DataContext class, and dragged the Customers **node** ...  
 www.feedshow.com/show\_items-feed=191d3d273251f9d1f92e66296fa84ee4-OakLeaf%  
 20Systems?u= - 498k - [Cached](#) - [Similar pages](#)

[PDF] On representing, linking and distributing food metadata: a ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

form subject-predicate-**object** - each triple could visually be viewed as a **node**-. arc-**node** graph representation. The potential use of URIs for every element ...  
 www.informatics.sussex.ac.uk/prizes/doafi.pdf - [Similar pages](#)

[PDF] Grid Tools for the ATLAS ExperimentFile Format: PDF/Adobe Acrobat - [View as HTML](#)

Kademlia is a **Peer-to-peer distributed hash table** (DHT). It minimizes the number of. configuration messages **nodes** must send to learn about each other. ...  
 prodrigu.home.cern.ch/prodrigu/docs/thesis.pdf - [Similar pages](#)

[PDF] Automatic Software Upgrades for Distributed Systems Sameer AjmaniFile Format: PDF/Adobe Acrobat - [View as HTML](#)

how to use simulation **objects** to implement a **node**'s types. ... implements a **distributed**

**hash table**, ie, a key-value store where different servers store the ...  
 pmg.csail.mit.edu/~ajmani/papers/phdthesis.pdf - [Similar pages](#)

[PDF] EFFECTIVE BOOTSTRAPPING OF PEER-TO-PEER NETWORKS OVER MOBILE AD ...

File Format: PDF/Adobe Acrobat

**Insert** function stores a (key, value) pair at the **node** responsible for the key. Lookup function returns value. associated with a key from a **peer**. ...

etd.lsu.edu/docs/available/etd-07132006-055232/unrestricted/Dissertation.pdf -

[Similar pages](#)

[PDF] SNUP -T -PN

File Format: PDF/Adobe Acrobat

**node/peer-space**. **object-space**. identifier-**space**. Figure 2-2 Symbolic illustration of ...

Thus the application can **retrieve** information from these layers and ...

tumb1.biblio.tu-muenchen.de/publ/diss/ei/2005/schollmeier.pdf - [Similar pages](#)

00:00:00 --- log: started lisp/06.02.10 00:00:11 <cliini> Ah, it ...

I've been trying to do some logfile analysis with it and run out of RAM **space** with only

800000 **objects** 13:41:21 <nyef> muhoo: Except that GET is defined to ...

tunes.org/~nef/logs/lisp/06.02.10 - 191k - [Cached](#) - [Similar pages](#)

irtf-p2prg-survey-search-00.txt

For an overlay of 10000 **nodes**, they simulated the delay to **retrieve** tuples ... Fault Tolerant

**Distributed Hash Table**, Second Int'l Workshop on **Peer-to-Peer** ...

ietfreport.isoc.org/idref/draft-irtf-p2prg-survey-search/ - 238k - [Cached](#) - [Similar pages](#)

[PDF] A Distributed Publish/Subscribe Notification Service for Pervasive ...

File Format: PDF/Adobe Acrobat

ical **space** and computing **nodes** is softend. Physical **objects** can serve ... on top of a

**distributed hash table**; the common data structure for **peer-to-peer** ...

elib.tu-darmstadt.de/diss/000519/thesisFinal.pdf - [Similar pages](#)

[PDF] Designs and Analyses in Structured Peer-to-Peer Systems

File Format: PDF/Adobe Acrobat

tures [6, 5], that **nodes** of a DKS(N,k,f) and **objects** managed by these. **nodes** are uniquely identified by identifiers taken from the same **logical space**. ...

eprints.sics.se/163/01/phd.pdf - [Similar pages](#)

[PDF] Query Evaluation Techniques for Data Integration Systems

File Format: PDF/Adobe Acrobat

(0, 1, 2) so that every **node** has three neighbors. In order to update the SP/SP indices after the modification of the SP/P index of. super-**peer** SP ...

www.opus-bayern.de/uni-passau/volltexte/2004/40/pdf/QETechniquesForDISystems.pdf -

[Similar pages](#)

[PDF] First Workshop on the Economics of Networked Systems (NetEcon06)

File Format: PDF/Adobe Acrobat

our solution is different from **distributed hash table** (DHT)-based. approaches where a

**peer** u ... the graph to **insert** self-loops for each **node** with out- ...

www.cs.duke.edu/nicl/netecon06/papers/proceedings.pdf - [Similar pages](#)

[PDF] Designing P2P Networks

File Format: PDF/Adobe Acrobat - [View as HTML](#)

ing to the **nodes** content, implementing a **distributed hash table** abstraction ... How does a

**peer** **retrieve** information about what is happening across the ...

www.cs.uni-paderborn.de/cs/ag-madh/WWW/Teaching/2004WS/Design-

P2P/Submissions/Designing%20P2P%20networks.pdf - [Similar pages](#)

[PDF] Certified by.....

File Format: PDF/Adobe Acrobat

To **retrieve objects** using this kind of URL, the Web browser uses the SFR client ... **nodes** nearby in ID **space**. To drive our simulations, we used two days of ...

<https://dspace.mit.edu/bitstream/1721.1/28733/1/59667380.pdf> - [Similar pages](#)

[PDF] UNIVERSITY OF CALIFORNIA SANTA CRUZ DESIGN AND MANAGEMENT OF ...

File Format: PDF/Adobe Acrobat

that can **retrieve** different types of data and allow their sharing. ... Therefore, the benefit of placing an **object** at a certain cache **node** cannot be ...

[www.cs.ucsc.edu/~ari/Ari-PhD-Thesis.pdf](http://www.cs.ucsc.edu/~ari/Ari-PhD-Thesis.pdf) - [Similar pages](#)

[DOC] Model Cover Page for DeliverablesFile Format: Microsoft Word - [View as HTML](#)

In **peer-to-peer** systems, some of the **nodes** are sometimes elevated to a ... This coordinate **space** is completely **logical** and bears no relation to any physical ...

[eu-datagrid.web.cern.ch/.../2-DataGrid-1Y-EU-Deliverables/](http://eu-datagrid.web.cern.ch/.../2-DataGrid-1Y-EU-Deliverables/)

FirstYearDeliverables/d2.1/D2.1-v3.2.doc - [Similar pages](#)

FreeBSD Ports Collection Index

glbsp-2.20 -- BSP **node** builder for OpenGL ports of the DOOM game engine ... p5-Astro-

SpaceTrack-0.022 -- **Retrieve** orbital data from [www.space-track.org](http://www.space-track.org) ...

[www.freebsd.org/ports/master-index.html](http://www.freebsd.org/ports/master-index.html) - [Similar pages](#)

Индекс Коллекции Портов FreeBSD

p5-Astro-SpaceTrack-0.022 -- **Retrieve** orbital data from [www.space-track.org](http://www.space-track.org) ... p5-Net-

OpenDHT-0.33 -- Access the Open **Distributed Hash Table** (Open DHT) ...

[www.freebsd.org/ru/ports/master-index.html](http://www.freebsd.org/ru/ports/master-index.html) - [Similar pages](#)

[PDF] The Host Identity ProtocolFile Format: PDF/Adobe Acrobat - [View as HTML](#)

When a **peer node** receives a LOCATOR parameter it will verify the reachability of ...

OpenDHT is a public accessible **Distributed Hash Table** (DHT) service. ...

[kom.aau.dk/group/05gr680/report/report.pdf](http://kom.aau.dk/group/05gr680/report/report.pdf) - [Similar pages](#)

[PDF] Improving End-to-End Availability Using Overlay Networks David ...File Format: PDF/Adobe Acrobat - [View as HTML](#)

no **peer** proxy was able to **retrieve** the data. TCP RST packets indicate ... using

**distributed hash table** lookups to route between overlay **nodes**, and using the ...

[www.cs.cmu.edu/~dga/papers/andersen-phd-thesis.pdf](http://www.cs.cmu.edu/~dga/papers/andersen-phd-thesis.pdf) - [Similar pages](#)

[PDF] Proceedings of the Eighth International Workshop on the Web and ...

File Format: PDF/Adobe Acrobat

tify the **logical** data source to which the **object** belongs. We first ... **peer's** local graph with the additional world **node**. The world **node** has special ...

[webdb2005.uhasselt.be/webdb05\\_eproceedings.pdf](http://webdb2005.uhasselt.be/webdb05_eproceedings.pdf) - [Similar pages](#)

[PDF] NCCR: 4 Progress Report – Shortened versionFile Format: PDF/Adobe Acrobat - [View as HTML](#)

describe services provided by the **nodes** in a **peer to peer** system. ... Distributed Component **Object Model**. DHT. **Distributed Hash Table** ...

[www.mics.org/Annexes/report-y4-short.pdf](http://www.mics.org/Annexes/report-y4-short.pdf) - [Similar pages](#)

[PDF] ICME 2006

File Format: PDF/Adobe Acrobat

In this paper, we propose an original scheme to **retrieve** among all the target images of a database, those which contain the. same **object** as that represented ...

[www.icme2006.org/ICME2006\\_ProgramGuide.pdf](http://www.icme2006.org/ICME2006_ProgramGuide.pdf) - [Similar pages](#)

### [PDF] [Posters and Demos](#)

File Format: PDF/Adobe Acrobat

All ATLAS **nodes**. cooperate to run. the protocols. **insert** RDF triples. receive answers ... with a tag k, users can **retrieve** information **objects** related ...  
[www.eswc2006.org/technologies/usb/proceedings-posters-demos/eswc2006-poster-demo-proceedings.pdf](http://www.eswc2006.org/technologies/usb/proceedings-posters-demos/eswc2006-poster-demo-proceedings.pdf) - [Similar pages](#)

### [PDF] [Better Anonymous Communications](#)

File Format: PDF/Adobe Acrobat

dynamic nature of **peer-to-peer** networks, and the volatility of **nodes**. On ... The request phase is then used by Alice to **retrieve** her email from the ...  
[freehaven.net/anonbib/cache/george-thesis.pdf](http://freehaven.net/anonbib/cache/george-thesis.pdf) - [Similar pages](#)

### [PDF] [c 2005 by Yi Cui. All rights reserved.](#)

File Format: PDF/Adobe Acrobat

protocol, **distributed hash table**, etc. These mechanisms can effectively capture ... If a **node** can **retrieve** data from m other **nodes**, then following the same ...  
[cairo.cs.uiuc.edu/publications/paper-files/thesis\\_yicui.pdf](http://cairo.cs.uiuc.edu/publications/paper-files/thesis_yicui.pdf) - [Similar pages](#)

### [PDF] [page de garde.mdi](#)

File Format: PDF/Adobe Acrobat

reconciliation phase, reconciler **nodes** **retrieve** actions. and constraints from the DHT and produce ... the consistency code separately from the **object logic** ...  
[chapters.ieeeefrance.org/computer/download/Actes\\_cdur2005.pdf](http://chapters.ieeeefrance.org/computer/download/Actes_cdur2005.pdf) - [Similar pages](#)

### [PDF] [Distributed Search in Semantic Web Service Discovery](#)

File Format: PDF/Adobe Acrobat - [View as HTML](#)

where each **peer** contains Local **Node** Repository. These repositories use the Sesame ... Due to the properties of the Chord **distributed hash table**, each **insert** ...  
[etd.uwaterloo.ca/etd/jiziambi2006.pdf](http://etd.uwaterloo.ca/etd/jiziambi2006.pdf) - [Similar pages](#)

### [PDF] [Proceedings](#)

File Format: PDF/Adobe Acrobat

When a **peer** wants to **insert** a new **object**, it first consults its local AST, ... neighbors (or **logical** neighbors). The domain of a **node** includes all its ...  
[people.csail.mit.edu/wolfgang/papers/ICDE-EDBT.pdf](http://people.csail.mit.edu/wolfgang/papers/ICDE-EDBT.pdf) - [Similar pages](#)

### [Current Internet-Drafts This summary sheet provides a short ...](#)

With the presented extensions the restarting **node** can recover all previously transmitted Path state including the Explicit Route **Object** and the downstream ...  
[free.vism.org/ID/1id-abstracts.txt](http://free.vism.org/ID/1id-abstracts.txt) - [Similar pages](#)

### [PDF] [Contract-based Web Service Composition](#)

File Format: PDF/Adobe Acrobat

State **space** containing all possible configurations of the **objects** upon ... In a **peer-to-peer** network. data is stored on the **nodes** and replicated to insure ...  
[edoc.hu-berlin.de/dissertationen/milanovic-nikola-2006-06-13/PDF/milanovic.pdf](http://edoc.hu-berlin.de/dissertationen/milanovic-nikola-2006-06-13/PDF/milanovic.pdf) - [Similar pages](#)

### [PDF] [WSS 2004](#)

File Format: PDF/Adobe Acrobat

Users can control and **retrieve** results remotely and in-stantly. Computer. Science. Related ... child **node** (A=2, D=2) and **insert** it into the rule tree. ...  
[www2.cs.uregina.ca/~wss/wss04/wss04.pdf](http://www2.cs.uregina.ca/~wss/wss04/wss04.pdf) - [Similar pages](#)

### [Rejstřík kolekce portů FreeBSD](#)



p5-Astro-SpaceTrack-0.022 - **Retrieve** orbital data from [www.space-track.org](http://www.space-track.org) ... p5-Net-OpenDHT-0.33 - Access the Open **Distributed Hash Table** (Open DHT) ... [www.freebsd.cz/cs/ports/master-index.html](http://www.freebsd.cz/cs/ports/master-index.html) - [Similar pages](#)

[PDF] [Architecture, protocols and services](#)

File Format: PDF/Adobe Acrobat

**distributed hash table** (DHT), in which **nodes** are assigned a unique ... each **peer** is arranged in a circular ID **space** and maintains links with its immediate ... [cnd.iit.cnr.it/mobileMAN/deliverables/MobileMAN\\_D5.pdf](http://cnd.iit.cnr.it/mobileMAN/deliverables/MobileMAN_D5.pdf) - [Similar pages](#)

[PDF] [NASA/IEEE MSST 2004 Twelfth NASAGoddard Conference on Mass Storage ...](#)

File Format: PDF/Adobe Acrobat

data is done via commands applied to the **logical** name **space**. ... Given an **object** identifier, we need to **retrieve** the **object** from the disk. ...

[ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20040121020\\_2004117345.pdf](http://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/20040121020_2004117345.pdf) - [Similar pages](#)

[PDF] [NIRA: A New Internet Routing Architecture](#)

File Format: PDF/Adobe Acrobat

based on the distances of these **nodes** to **node m** in the **logical** geometry ... from the address **space** pf and **insert** the prefix into its downhill table with the ...

[www.lcs.mit.edu/publications/pubs/pdf/MIT-LCS-TR-967.pdf](http://www.lcs.mit.edu/publications/pubs/pdf/MIT-LCS-TR-967.pdf) - [Similar pages](#)

[PDF] [Multiagent Based Supply Chain Management: A Brief Introduction](#)

File Format: PDF/Adobe Acrobat

The RMF implements a **distributed hash table** - referred to as the P2P ... information to discover the **object** and **retrieve** it from an external **object** ...

[www.damas.ift.ulaval.ca/~chaib/MBSCM-pdf/MBSCM-CompleteBOOK.pdf](http://www.damas.ift.ulaval.ca/~chaib/MBSCM-pdf/MBSCM-CompleteBOOK.pdf) - [Similar pages](#)

[Software :: Betas.Intercom.Net :: News and betas from a different ...](#)

eXeem™ is a brand new **Peer-To-Peer** program, which is based on the BitTorrent idea.

eXeem™ eliminates the need for trackers as **nodes** in the program will be ...

[betas.intercom.net/index.php?name=News&catid=&topic=19&allstories=1](http://betas.intercom.net/index.php?name=News&catid=&topic=19&allstories=1) - [Similar pages](#)

[PDF] [博士學位論文](#)

File Format: PDF/Adobe Acrobat

That is, these P2P systems include a **distributed hash table** component to. distribute **objects** among "**peer nodes**" by choosing random identifiers for the ...

[pc01.lib.ntust.edu.tw/ETD-db/ETD-search/getfile?URN=etd-0609105-163717&filename=etd-0609105-163717.pdf](http://pc01.lib.ntust.edu.tw/ETD-db/ETD-search/getfile?URN=etd-0609105-163717&filename=etd-0609105-163717.pdf) - [Similar pages](#)

[From nhodgson at bigpond.net.au Sun Aug 1 00:27:40 2004 From ...](#)

Needs: - high redundancy - high probability of being able to **retrieve** data even if (say) 30% of **nodes** are down - pure-python implementation - **peer to peer** ...

[mail.python.org/pipermail/python-list/2004-August.txt](http://mail.python.org/pipermail/python-list/2004-August.txt) - [Similar pages](#)

[PDF] [A Session-Based Architecture for Internet Mobility Mark Alexander ...](#)

File Format: PDF/Adobe Acrobat

send packets destined for a mobile **node** to its home address on its home network, ...

Naming systems use widely varied methods to store and **retrieve** name ...

[nms.lcs.mit.edu/papers/thesis\\_snoeren.pdf](http://nms.lcs.mit.edu/papers/thesis_snoeren.pdf) - [Similar pages](#)

[FreeBSD Ports Collection Index](#)

p5-XML-Node-0.11 -- Perl5 module to extend and simplify XML::Parser p5-XML-NodeFilter-

0.01 -- A XML::NodeFilter is an **object** that know how to "filter out" ...

[www.tr.freebsd.org/ports/master-index.html](http://www.tr.freebsd.org/ports/master-index.html) - [Similar pages](#)

### FreeBSD Ports Collection Index

slurp-1.10\_2 – Passive NNTP client to **retrieve** Usenet articles from a remote server

slurpie-2.0b – A passwd file cracker (supports distributed **nodes**) ...

[www.pl.freebsd.org/ports/master-index.html](http://www.pl.freebsd.org/ports/master-index.html) - [Similar pages](#)

### RPM shipped by Mandriva

clusterscripts-client-1.3-1mdk.noarch, Script to setup and **retrieve** information for client

**node**. Mandriva devel cooker for amd64 ...

[rpmfind.net/linux/RPM/mandriva/devel/cooker/amd64/media/contrib/Mandriva.html](http://rpmfind.net/linux/RPM/mandriva/devel/cooker/amd64/media/contrib/Mandriva.html) -

[Similar pages](#)

### RPM of Distribution Mandriva Linux

clusterscripts-client-1.3-1mdk.noarch, Script to setup and **retrieve** information for client

**node**. Mandriva devel 2007.0 for x86\_64 ...

[rpmfind.net/linux/RPM/mandriva/devel/2007.0/x86\\_64/media/contrib/Mandriva\\_Linux.html](http://rpmfind.net/linux/RPM/mandriva/devel/2007.0/x86_64/media/contrib/Mandriva_Linux.html) -

[Similar pages](#)

### はてなブックマーク - dannのブックマーク / 2005年10月16日 - [ Translate this page ]

To convert retrieved XML data into renderable HTML content, rely on the client-side

Document **Object** Model (DOM) to read the XML document **node** tree and c... ..

[b.hatena.ne.jp/dann/20051016?mode=detail](http://b.hatena.ne.jp/dann/20051016?mode=detail) - [Similar pages](#)

### FreeBSD Ports Collection Index

p5-Tree-Binary-0.07 – An **Object** Oriented Binary Tree for Perl p5-Tree-DAG\_Node-1.05 –

Super class for representing **nodes** in a tree ...

[www2.de.freebsd.org/ports/master-index.html](http://www2.de.freebsd.org/ports/master-index.html) - [Similar pages](#)

### Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...

dht - **distributed hash table** - se distribuerad kondensattabell. ... fuzzy **logic** - graderad

logik, mjuk logik - logiskt system som hanterar mellanlägen ...

[cstjanster.idg.se/sprakwebben/ord.asp?ord=asp](http://cstjanster.idg.se/sprakwebben/ord.asp?ord=asp) - [Similar pages](#)

### FreeBSD Ports Collection 一覧 - [ Translate this page ]

gtkballs-3.1.5\_2 – Lines 風のシンプルな **logic** ゲーム (X Window System 用) ... にHTML の

作成をする perl スクリプト htmlsection-1.1 – **Insert** section numbers ...

[www.it.freebsd.org/ja/ports/master-index.html](http://www.it.freebsd.org/ja/ports/master-index.html) - [Similar pages](#)



Result Page: [Previous](#) [1](#) [2](#) [3](#) [Next](#)

[Search within results](#) | [Language Tools](#) | [Search Tips](#)

[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)

©2006 Google

[Sign in](#)[Web](#) [Images](#) [Groups](#) [News](#) [Froogle](#) [Maps](#) [more »](#)

insert retriev object node logical space peer "d

Search

[Advanced Search](#)  
[Preferences](#)**Web** Results 201 - 205 of about 425 for insert retriev object node logical space peer "distributed hash tabl[\[PDF\] Effiziente Echtzeit-Kommunikationsdienste durch Einbeziehung von ...](#)

File Format: PDF/Adobe Acrobat

tralized **Object** Location, and Routing for Large-Scale **Peer-to-Peer** Sys- ... Im **Retrieve** FP

Menü können die Daten zu einem bestimmten Raum und Position aus ...

deposit.ddb.de/cgi-bin/dokserv?idn=976136201&amp;


dok\_var=d1&dok\_ext=pdf&filename=976136201.pdf - [Similar pages](#)[FreeBSD Ports Collection 一覧](#) - [ [Translate this page](#) ]gtkballs-3.1.5\_2 -- Lines 風のシンプルな **logic** ゲーム (X Window System 用) ... p5-Astro-SpaceTrack-0.022 -- **Retrieve** orbital data from [www.space-track.org](#) ...[www.uk.freebsd.org/ja/ports/master-index.html](#) - [Similar pages](#)[Computer Sweden - Sveriges IT-tidning - dagliga nyheter om it ...](#)blob - binary large **object**. En mycket stor fil, till exempel en bild, videosnutt eller ... dht -**distributed hash table** - se distribuerad kondensattabell. ...cstjanster.idg.se/sprakwebben/ord.asp?ord=OR - [Similar pages](#)[\[PDF\] Thèse Luis Garcés-Erice Un Réseau P2P Hiérarchique: Design et ...](#)

File Format: PDF/Adobe Acrobat

chosen from that portion of the **node ID space**. This implies that during a ... **Peer-to-peer**systems with **Distributed Hash Table** look-up make specific data ...[www.eurecom.fr/~btroup/BPublished/garces\\_phd.pdf](#) - [Similar pages](#)[Get Real: Stowe Boyd's Soapbox](#)A clever protocol, based on a Kademlia **distributed hash table** or "DHT", allows clients to efficiently store and **retrieve** contact information for peers in a ...[getreal.corante.com/archives/technology/](#) - [Similar pages](#)

*In order to show you the most relevant results, we have omitted some entries very similar to the 205 already displayed.*

*If you like, you can repeat the search with the omitted results included.*

Result Page: [Previous](#) [1](#) [2](#) [3](#)

insert retriev object node logical spa Search

[Search within results](#) | [Language Tools](#) | [Search Tips](#)[Google Home](#) - [Advertising Programs](#) - [Business Solutions](#) - [About Google](#)